



### Typical connections

**Either** universal control voltage 8 to 230 V UC

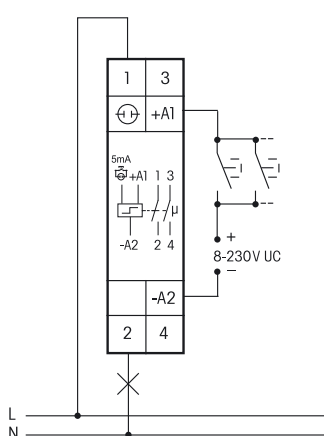

**or** control voltage 230 V with glow lamp current up to 5 mA

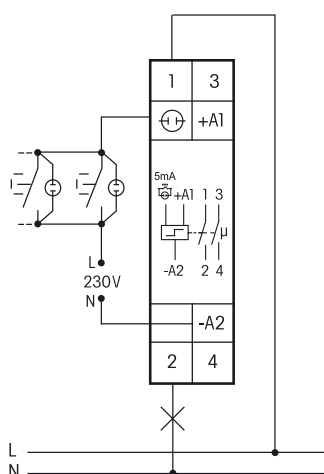

Technical data page 11-15.  
Housing for operating instructions GBA14,  
see accessoires, chapter Z.

## ES12-200-UC



**2 NO contacts potential free 16 A/250 V AC. 230 V LED lamps up to 200 W, incandescent lamp load up to 2000 W. No standby loss.**

Modular device for DIN-EN 60715 TH35 rail mounting.

1 module = 18 mm wide, 58 mm deep.

**Either** universal control voltage 8 to 230 V UC at the control input +A1/A2

**or** 230V with glow lamp current up to 5 mA at the control input  $\oplus$  (L)/-A2(N).

The simultaneous use of two potentials at the control inputs is not permitted.

Very low switching noise.

**No permanent power supply necessary, therefore no standby loss.**

State-of-the-art hybrid technology combines advantages of nonwearing electronic control with high capacity of special relays.

**By using a bistable relay coil power loss and heating is avoided even in the on mode.**

The relay contact can be open or closed when putting into operation. It will be synchronised at first operation.

Same terminal connection as the electromechanical impulse switch S12-200-.

Maximum current across both contacts 16 A for 230 V.

**If this impulse switch is in a circuit, which is monitored by a FR12-230V mains disconnection relay, no additional base load is required. However, the monitoring voltage of the FR12-230V must be set to 'max'.**

The electronics does not have an internal power supply and therefore no power is consumed in any contact position. A control current flows only during a short control impulse of 0.2 seconds. This activates the microcontroller, reads the last switching state from the non-voltage memory, switches the bistable relay to its opposite state accordingly and rewrites the new switching state to memory

ES12-200-UC	2 NO contacts 16 A	EAN 4010312108048	
-------------	--------------------	-------------------	--