


K 121 W



K 121 W - K 121 W3

Technical specifications. 5 mm coaxial cable. K 121 W

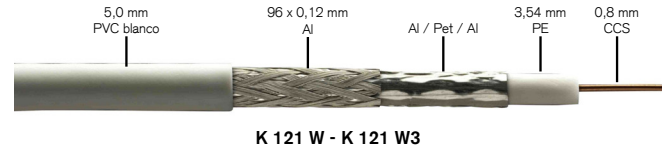

	K 121 W	K 121 W3
Code	0703400	0703401
Inner conductor (mm) Ø	0,8 CCS	0,8 CCS
Dielectric (mm) Ø	3,54 PE physical foam	3,54 PE physical foam
Foil material	Al / Pet / Al	Al / Pet / Al
Braiding material	Al	Al
Number of wires (braiding)	96	96
Braiding composition	16 x 6 x 0,12 mm	16 x 6 x 0,12 mm
Braiding coverage	80 %	80 %
Outer jacket (mm) Ø	5,0 PVC white	5,0 PVC white
Screening factor (30 - 900 MHz)	> 85 dB	> 85 dB
Nominal attenuation (dB / 100 m)		
47 MHz	5,9	5,9
175 MHz	10,7	10,7
470 MHz	17,35	17,35
862 MHz	23,98	23,98
950 MHz	25,2	25,2
1350 MHz	30,45	30,45
1750 MHz	34,89	34,89
2150 MHz	38,98	38,98
Length (m)	100	300
Impedance (Ω)	75	75
Net weight (Kg)	2,38	7,2
Presentation	100 m cardboard spool	300 m wooden drum
Reaction to fire	Fca	Fca
No. Declaration of Performance (DoP)	DOP-0703400	DOP-0703401
EAN Code 13	8436023599139	8436018447063
Packaging quantity	1 / 4	1

