


K 290 W reel



K 290 W - K 290 W3

Technical specifications. 6,8 mm coaxial cable K 290 W

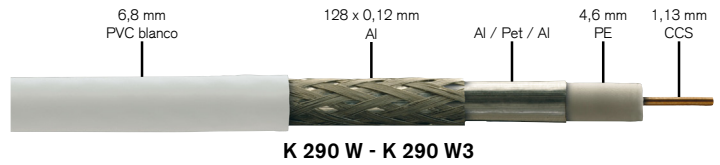

	K 290 W	K 290 W3
Code	0703408	0703410
Inner conductor (mm) Ø	1,13 CCS	1,13 CCS
Dielectric (mm) Ø	4,6 PE	4,6 PE
Foil material	Al / Pet / Al	Al / Pet / Al
Braiding material	Al	Al
Number of wires (braiding)	128	128
Braiding composition	16 x 8 x 0,12 mm	16 x 8 x 0,12 mm
Outer jacket (mm) Ø	6,8 PVC white	6,8 PVC white
Screening factor (30 - 900 MHz)	> 90 dB	> 90 dB
Nominal attenuation (dB / 100 m)		
47 MHz	3,7	3,7
175 MHz	6,7	6,7
470 MHz	11,2	11,2
862 MHz	16,2	16,2
950 MHz	17,5	17,5
1350 MHz	21,8	21,8
1750 MHz	25,0	25,0
2150 MHz	28,2	28,2
Lenght (m)	100	300
Impedance (Ω)	75	75
Net weight (Kg)	4,17	12,6
Presentation	100 m cardboard spool	300 m wooden drum
Reaction to fire	CPR-Fca	CPR-Fca
No. Declaration of Performance (DoP)	DOP-0703408	DOP-0703410
EAN Code 13	8436023599177	8436023599184
Packaging quantity	1 / 4	1

