

Perforated steel banding LBV / LBK for the fast fixing of pipelines



Plastic pipes

ADVANTAGES/BENEFITS

- The perforated tape's material thicknesses and plastic covering allows the tapes to be easily cut to size using metal shears.
- The perforated tape's hole geometry enables concrete fixing using the fischer impact nail ED.


APPLICATIONS

- Steel tape with stamped holes for simple installation; available zinc-plated LBV or plastic-covered LKB
- The fischer nail anchor FNA II is suitable for ceiling fixing in concrete
- Use fischer thread hanger RAH for fastening to threaded rods

PROPERTIES

- **Material:** steel DX5 1D+Z (material no. 1.0226) acc. to DIN EN 10327
- **Zinc plating:** electro zinc-plated, min. 7 µm
- **Protective coating LBK:** PE

TECHNICAL DATA

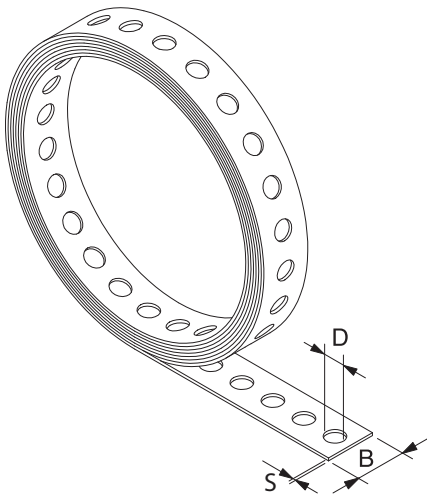

Item	Art.-No.	Total length	Width B	Thickness	Eye-Ø	Sales unit
		l [mm]	B [mm]	S [mm]	D [mm]	[pcs]
LBV 12	079549	10000	12	0.75	5	10
LBV 17	079550	10000	17	0.75	6.5	10
LBV 25	079551	10000	25	0.88	8.5	8
LBK 14	079553	10000	14	2.6	5	10
LBK 19	079554	10000	19	2.4	6.5	8
LBK 27	079555	10000	27	2.4	8.5	5

