






Contact element, 1 N/C, front mount, 6. contact, spring clamp connection

Part no. **M22-CK01**
 Catalog No. **216385**
 Alternate Catalog No. **M22-CK01Q**
 EL-Nummer (Norway) **4355767**

Delivery program


| | | |
|---|----|--|
| Product range | | Accessories |
| Basic function accessories | | Contact elements |
| Accessories | | Auxiliary contact |
| Accessories | | Standard auxiliary contact, trip-indicating auxiliary switch |
| Standard/Approval | | UL/CSA, IEC |
| Construction size | | NZM1/2/3/4 |
| Description | | Cage Clamp is a registered trademark of Wago Kontakttechnik GmbH/Minden, Germany |
| Connection technique | | Cage Clamp |
| Fixing | | Front fixing |
| Degree of Protection | | IP20 |
| Connection to SmartWire-DT | | no |
| For use with | | NZM1(-4), 2(-4), 3(-4), 4(-4) PN1(-4), 2(-4), 3(-4) N(S)1(-4), 2(-4), 3(-4), 4(-4) |
| Approval | |  ET 16107 Sicherheit geprüft tested safety |
| Contacts | | |
| N/C = Normally closed | | 1 NC  |
| Notes | |  = safety function, by positive opening to IEC/EN 60947-5-1 |
| Actuator travel and actuation force as per DIN EN 60947-5-1, K.5.4.1 | | |
| | mm | 4.8 |
| Maximum travel | mm | 5.7 |
| Minimum force for positive opening | N | 15 |

Contact sequence




Contact travel diagram, stroke in connection with front element

Contact diagram



Configuration



Connection type

Single contact

Description of HIA trip-indicating auxiliary contact

General trip indication '+', when tripped by shunt release, overload release, short-circuit release or by the residual-current release due to residual-current. Can be used with NZM1, 2, 3 circuit-breaker: a trip-indicating auxiliary contact can be clipped into the circuit-breaker. Can be used with NZM4 circuit-breaker: up to two standard auxiliary contacts can be clipped into the circuit-breaker. Any combinations of the auxiliary contact types are possible. Not in combination with switch-disconnector PN... Marking on switch: HIA. Labeling in FI-Block: HIAFI. If the trip-indicating auxiliary switch in the fault current block is used, the NC contacts operates as a N/O contact and the NC contact operates as an N/O contact.

Description standard auxiliary contact HIN

Switching with the main contacts Used for indicating and interlocking tasks. Can be used with NZM1 circuit-breaker: a standard auxiliary contact can be clipped into the circuit-breaker. Can be used with NZM2 size circuit-breaker: a standard auxiliary contact can be clipped into the circuit-breaker. Can be used with NZM3, 4 circuit-breaker: up to three standard auxiliary contacts can be clipped into the circuit-breaker. Any combinations of the auxiliary contact types are possible. Marking on switch: HIN. On combination with remote operator NZM-XR... the right mounting location of standard auxiliary contact HIN can be fitted only with individual contacts.

Connection technique

Cage Clamp

Notes

The following can be clipped into the switches:

- NZM1: a standard auxiliary contact
- NZM2: up to two M22-(C)K... standard auxiliary contacts
- NZM3: up to three M22-(C)K... standard auxiliary contacts
- NZM4: up to three M22-(C)K... standard auxiliary contacts

Any combinations of the auxiliary contact types are possible.

Marking on switch: HIN

In combination with remote operator NZM-XR... only single contacts can be fitted to some installation locations of the standard auxiliary contact.

NZM2: Only single contact can be fitted in left installation location of standard auxiliary contact.

NZM3: Only single contact can be fitted in installation locations of standard auxiliary contact.

Technical data

General

| | | | |
|---|-----------------|---------------|--|
| Standards | | | IEC 60947-5-1 |
| Lifespan, mechanical | Operations | $\times 10^6$ | > 5 |
| Operating frequency | Operations/h | | ≤ 3600 |
| Actuating force | n | | ≤ 5 |
| Degree of Protection | | | IP20 |
| Climatic proofing | | | Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature | | | |
| Open | °C | | -25 - +70 |
| Mechanical shock resistance to IEC 60068-2-27 Shock duration 11 ms, half-sinusoidal | g | | > 30 |
| Terminal capacities | mm ² | | |
| Solid | mm ² | | 0.75 - 2.5 |
| Stranded | mm ² | | 0.5 - 2.5 |
| Flexible with ferrule | mm ² | | 0.5 - 1.5 |

Contacts

| | | | |
|---------------------------------------|-----------|-------------------|---|
| Rated impulse withstand voltage | U_{imp} | V AC | 6000 |
| Rated insulation voltage | U_i | V | 500 |
| Overvoltage category/pollution degree | | | III/3 |
| Control circuit reliability | | | |
| at 24 V DC/5 mA | H_F | Fault probability | $< 10^{-7}$ (i.e. 1 failure to 10^7 operations) |
| at 5 V DC/1 mA | H_F | Fault probability | $< 5 \times 10^{-6}$ (i.e. 1 failure in 5×10^6 operations) |
| Max. short-circuit protective device | | | |
| Fuseless | | Type | PKZM0-10/FAZ-B6/1 |
| Fuse | gG/gL | A | 10 |

Switching capacity

| | | | |
|---------------------------|------------|---------------|-----|
| Rated operational current | I_e | A | |
| AC-15 | | | |
| 115 V | I_e | A | 6 |
| 220 V 230 V 240 V | I_e | A | 6 |
| 380 V 400 V 415 V | I_e | A | 4 |
| 500 V | I_e | A | 2 |
| DC-13 | | | |
| 24 V | I_e | A | 3 |
| 42 V | I_e | A | 1.7 |
| 60 V | I_e | A | 1.2 |
| 110 V | I_e | A | 0.8 |
| 220 V | I_e | A | 0.3 |
| Lifespan, electrical | | | |
| AC-15 | | | |
| 230 V/0.5 A | Operations | $\times 10^6$ | 1.6 |
| 230 V/1.0 A | Operations | $\times 10^6$ | 1 |
| 230 V/3.0 A | Operations | $\times 10^6$ | 0.7 |
| DV-13 | | | |
| 12 V/2.8 A | Operations | $\times 10^6$ | 1.2 |

Auxiliary contacts

| | | | |
|---------------------------------|-------|------|-----|
| Rated operational voltage | U_e | V | |
| Rated operational voltage | U_e | V AC | 500 |
| Rated operational voltage, max. | U_e | V DC | 220 |

| | | | | | | | | | |
|--|----------------|-----------------|---|----------------------------|--------------------------|------|-----|-----|-----|
| Conventional thermal current | $I_{th} = I_e$ | CSA | 4 | | | | | | |
| Rated operational current | I_e | A | | | | | | | |
| Different rated operational currents when used as auxiliary contact for NZM circuit-breaker | | | | M22- (C)K10(01) | M22- CK11(02) (20) | XHIV | | | |
| | | | | bei AC = 50/60 Hz | | | | | |
| | | | | Bemessungsbetriebsstrom | | | | | |
| | | | | AC-15 15 V | I_e | A | 4 | 4 | 4 |
| | | | | 230 V | I_e | A | 4 | 4 | 4 |
| | | | | 400 V | I_e | A | 2 | - | 2 |
| | | | | 500 V | I_e | A | 1 | - | 1 |
| | | | | DC-14 14 V | I_e | A | 3 | 3 | 3 |
| | | | | 42 V | I_e | A | 1.7 | 1 | 1.5 |
| | | | | 60 V | I_e | A | 1.2 | 0.8 | 0.8 |
| 110 V | I_e | A | 0.6 | 0.5 | 0.5 | | | | |
| 220 V | I_e | A | 0.3 | 0.2 | 0.2 | | | | |
| Rated conditional short-circuit current | I_q | kA | 1 | | | | | | |
| Short-circuit protection | | | | | | | | | |
| max. fuse | | A gG/gL | 10 | | | | | | |
| Max. miniature circuit-breaker | | A | FAZ-B6/B1 | | | | | | |
| Operating times | | | | | | | | | |
| | | | Early-make time of the HIV compared to the main contacts during with make and break switching. (switch times with manual operation): NZM1, PN1, N(S)1: ca. 20 ms NZM2, PN2, N(S)2: ca. 20 ms NZM3, PN3, N(S)3: ca. 20 ms NZM4, N(S)4: approx. 90 ms, the HIV switch early Offswitching not forward. | | | | | | |
| Terminal capacities | | mm ² | | | | | | | |
| Solid or flexible conductor, with ferrule | | mm ² | 1 x (0,5 - 1,5) 2 x (0,5 - 0,75) | | | | | | |
| Other technical data (sheet catalogue) | | | Maximum equipment and position of the internal accessories | | | | | | |

Design verification as per IEC/EN 61439

| | | | |
|--|------------|----|--|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | I_n | A | 6 |
| Heat dissipation per pole, current-dependent | P_{vid} | W | 0.11 |
| Equipment heat dissipation, current-dependent | P_{vid} | W | 0 |
| Static heat dissipation, non-current-dependent | P_{vs} | W | 0 |
| Heat dissipation capacity | P_{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -25 |
| Operating ambient temperature max. | | °C | 70 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | | | Meets the product standard's requirements. |

| | | |
|--|--|--|
| 10.5 Protection against electric shock | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | |
| 10.9.2 Power-frequency electric strength | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Auxiliary contact block (EC000041)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Auxiliary switch block (ecl@ss10.0.1-27-37-13-02 [AKN342013])

| | | |
|--|---|-----------------------------|
| Number of contacts as change-over contact | | 0 |
| Number of contacts as normally open contact | | 0 |
| Number of contacts as normally closed contact | | 1 |
| Number of fault-signal switches | | 0 |
| Rated operation current I _e at AC-15, 230 V | A | 6 |
| Type of electric connection | | Spring clamp connection |
| Model | | Top mounting and integrable |
| Mounting method | | Front fastening |
| Lamp holder | | None |


Approvals

| | | |
|-----------------------------|--|--|
| Product Standards | | IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking |
| UL File No. | | E29184 |
| UL Category Control No. | | NKCR |
| CSA File No. | | 012528 |
| CSA Class No. | | 3211-03 |
| North America Certification | | UL listed, CSA certified |
| Degree of Protection | | UL/CSA Type: - |

Dimensions

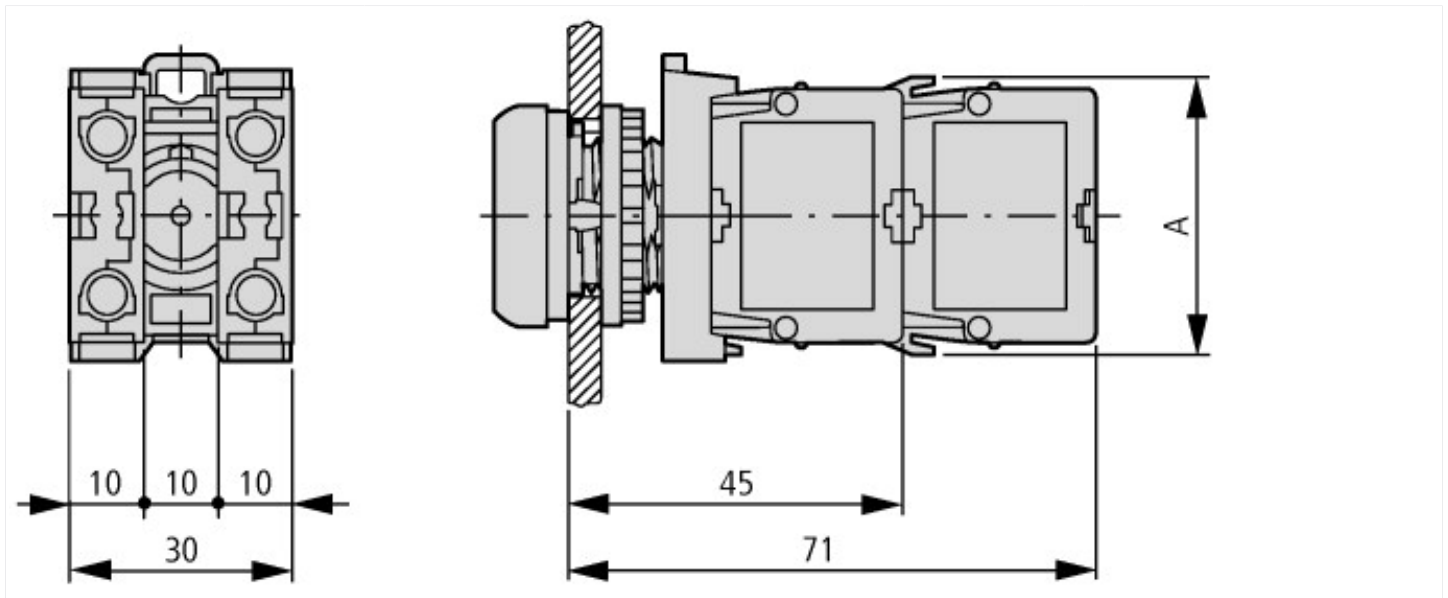

A = 39

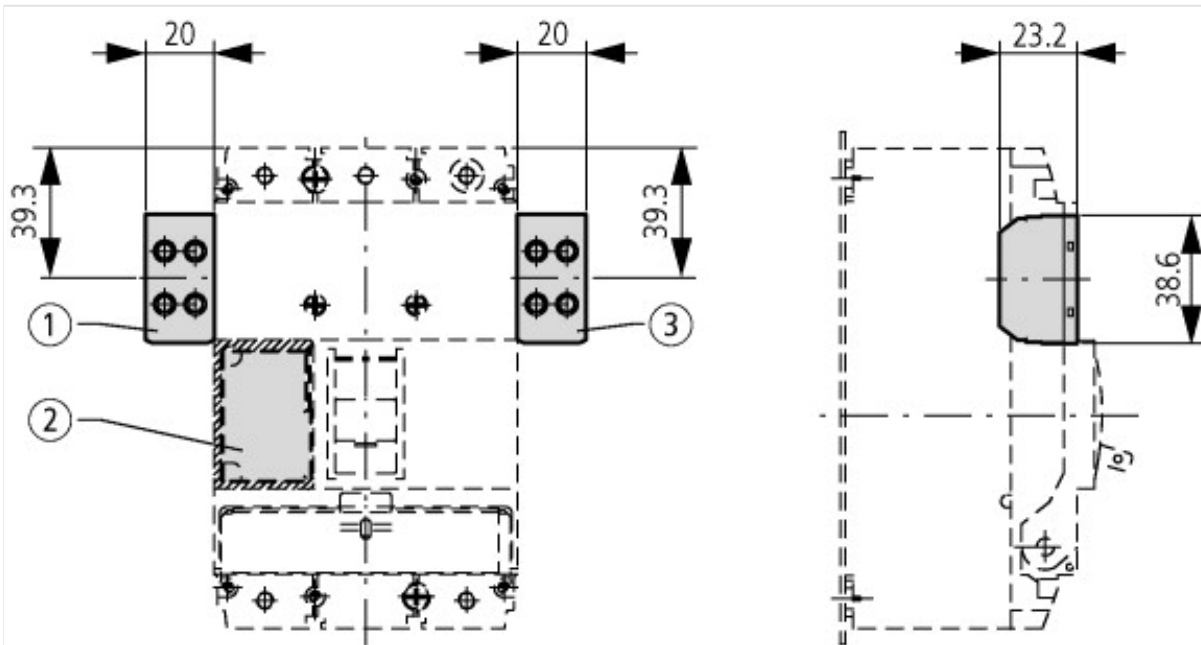

Pushbutton with M22-(C)K...
 Pushbutton with M22-(C) LED... + M22-XLED...

Additional product information (links)

IL04716002Z (AWA1160-1745) RMQ-Titan System

IL04716002Z (AWA1160-1745) RMQ-Titan System

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04716002Z2018_10.pdf

DGUV Test Mark Customer Information

http://www.dguv.de/medien/dguv-test-medien/_pdf_zip_doc_ppt/agb-und-pzo/dguv_test_zeichen_infoblatt_kunden.pdf

Maximum equipment and position of the internal accessories

<http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.178>