
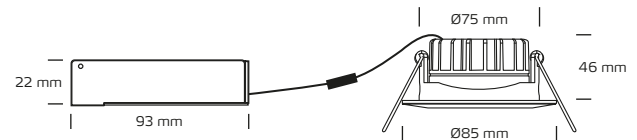
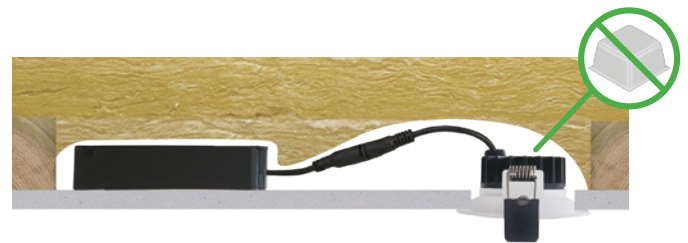


# Velia Low Profile 5W, 2700K

## Technical data

Voltage	220-240 VAC 50 Hz
System effect	5W
Light source	4W LED, item no. 31000002 <span style="border: 1px solid black; padding: 2px;">G</span>
Colour temperature	2700 Kelvin
Light intensity	310 Lumen
Colour rendering	CRI>95
Glare	UGR<19
Expected lifespan	50.000 hours L70
Dimmable	Yes, trailing edge
Flicker free	Yes, according to the new Ecodesign / ErP directive (September 2021)
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<3
Beam angle	55°
Carving dimensions	Ø75 mm, min. Ø68 mm, max. Ø83 mm
Installation height	46 mm
Exterior dimensions	Ø85 mm
Dimensions driver	L: 93 mm, W: 45 mm, H: 22 mm
Tilt angle	30°
Possibility of through wiring	Yes, 3G1,5 - 30 pcs.
IP-class	IP44 (is intended for installation in areas 1 and 2)
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoors
Warranty	5 years
Approvals	CE

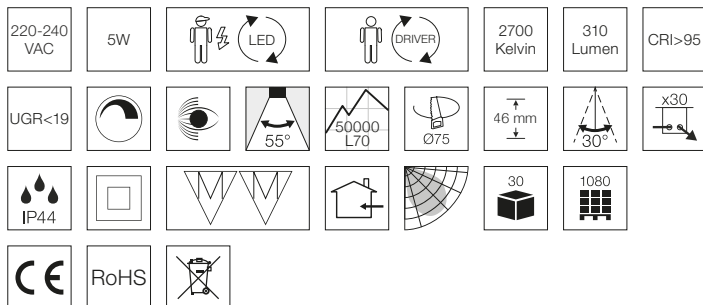

\*The drawing is not drawn to scale

## Product information

- Approved for installation directly in insulation and flammable materials
- High colour rendering index (CRI)
- High lumen output
- Mounting with springs
- Comes with removable driver, which makes it easy to connect the downlight for example after painting of the ceiling
- Quick and easy mounting
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Ceiling thickness for mounting is up to 26 mm

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
31143012	5704629000179	Matt white	Round
31143022	5704629000186	Brushed alu	Round
31143092	5704629000193	Matt black	Round