





LED CEILING SERIES



A+ SMART LED™

			
cool day white	140°	12w 18w 24w	1080lms 1620lms 2160lms



POWER FACTOR 0.5PF



Surface mounted dome LED ceiling light suitable for traditional and contemporary settings in commercial or residential use.

Light direction: Ambient




LGP

Using PMMA (Acrylic) and optical LGP (Light-Guiding Prismatic) high precision laser cutting, ensures a uniform and comfortable light diffusion from edge to edge.

FOAM RUBBER MAT

Using polyurethane soft foam rubber sealing mat isolator to reduce any transmission of heat. Fireproof material with high resistance to heat transfer.

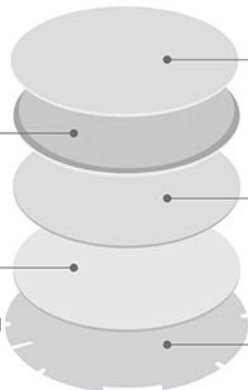

DIFFUSER PLATE

High light transmittance with 92% efficiency, produces a soft ambient light effect that is easy on the eyes and provides a comforting lighting environment.


REFLECTIVE SHEET

Super reflective back sheet for increased light efficiency.

REAR COVER

Steel rear cover

12w	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
	POWER: 12w = 1080lms VOLTS / Hz: 170 - 264V / 50-60Hz BEAM ANGLE: 140°	FITTING	White	Cool Day White	6500K	SLC260-12BSC
Size: ϕ 260mm						
18w	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
	POWER: 18w = 1620lms VOLTS / Hz: 170 - 264V / 50-60Hz BEAM ANGLE: 140°	FITTING	White	Cool Day White	6500K	SLC330-18BSC
Size: ϕ 330mm						
24w	SPECIFICATION	BASE	COVER COLOUR	COLOUR	CCT	CODE
	POWER: 24w = 2160lms VOLTS / Hz: 170 - 264V / 50-60Hz BEAM ANGLE: 140°	FITTING	White	Cool Day White	6500K	SLC380-24BSC
Size: ϕ 380mm						

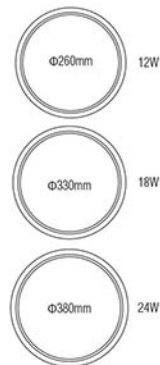

→ available in

COLOUR	CCT
Warm White	3000K

IEC CERTIFIED & APPROVED

IEC 62560:2011 + A1:2015
IEC 62031:2008 + A1:2012 + A2:2014

