

LM-CIRIA WH

Multipurpose control unit

Art. no. 22162349

Multifunctional control unit for commissioning, configuring and operating installations via the LUXMATE bus; white glass and frame

Application


Clear and labelled symbols make it ultra-simple for any user to select the right scene for their activity.

It is extremely easy and intuitive to control individual functions such as lighting, blinds, screen etc. all together or in groups.

The LM-CIRIA can also be used to commission the system in individual rooms.

Design notes


- For installation in a single Euro box to DIN 0606 of minimum depth 50mm.
- 230VAC and LM-bus
- If an LM-SG, LM-BG or LM-CG control unit is replaced with an LM-CIRIA control unit, metal plates are available for covering the double box: part no. 22185206 (metal finish) and 22185205 (white finish).

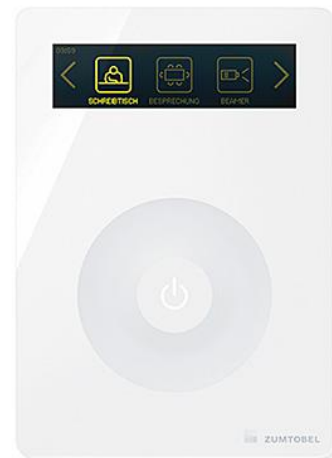

Functional description

- Easy to operate simply by touching the capacitive touchscreen on the glass front panel.
- Choice of up to 20 scenes.
- Individual control of up to 10 items of equipment.
- Dimming ring for infinite adjustment of the lighting level or other fine adjustments such as blinds slat angle.
- Central, illuminated ON/OFF button

Dimension



Label/connections



Technical data

Nominal voltage	230/240 V AC, 50/60 Hz
Permitted input voltage	230 ... 240 V AC, 50 ... 60 Hz
Power loss	< 1.5 W
Inputs	LUXMATE bus (B1, B2)
Bus loads	1 LUXMATE bus load (B1, B2)
Addressing	Room device: room address > 0; group address = 0 Group unit: room address > 0; group address > 0
Operation	ON-OFF button, 1 dimming wheel,
Display	OLED 256 x 64 pixels
Terminals	0,5-1,5 mm ²
Protection type	IP20
Protection class	Class II
Housing material	Glass front panel, halogen-free plastic housing
Case colour	white (equivalent to RAL 9010)
Installation	installed in single Euro box, dimensions as per DIN 0606 (Ø 60mm, minimum depth 50mm)
Dimensions	130 x 92 x 50 mm (upper section only)
Permitted ambient temperature	0 °C ... +50 °C
Weight	Approx. 0.3 kg