

WMB Touchpanel TCI

Reces. hous. for LITECOM Touchpanel TCI


Art. no. 28000376

Application

The WMB Touchpanel TCI mounting box is for wall-recessing the LITECOM Touchpanel TCI operating and configuration panel. This is suitable for flush-fitted and cavity-wall installation. The operating panel is installed into the mounted mounting box using the Allen key and screws supplied.

Design notes


- The mounting box must be installed horizontally
- Recommended installation height: top edge 1.50 m
- For cavity wall installation, see the graphic in "Installation Instructions" for the required dimensions for the cutout aperture
- The upper side and underside of the mounting box have two knock-outs with diameter 25 mm
- Only use knock-outs intended for cable infeed
- No through-wiring Do not use as e.g. distribution box etc.

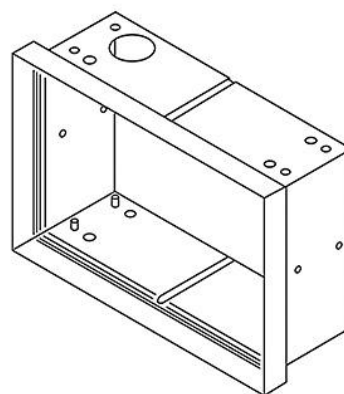

Mounting and installation instructions

Electrical installation conduit required for connection cable routing.

Dimension

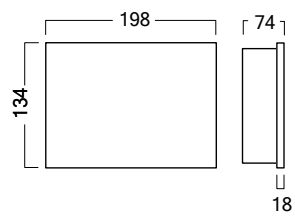

Technical data

Housing material	Galvanised steel sheet, coated black
Installation	Suitable for installation in concrete, flush-fitting and recess fitting
Dimensions	198 x 134 x 74 mm (outside dimensions)
Weight	Approx. 0.8 kg
Protection type	IP30
Miscellaneous	for voltages up to 400 V