



LYRA EVO

Item code **LV1303**
Descriptive code **LV32N10ABRT**

CE IP40 IK08

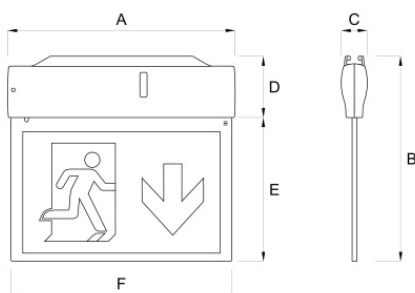

A=289mm B=261mm C=34mm
D=77mm E=185mm F=280mm

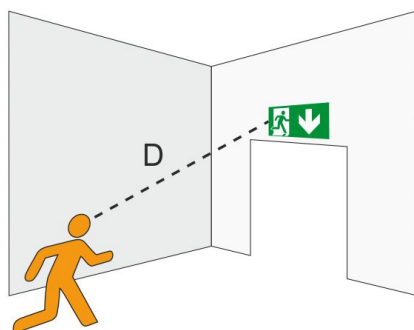

Signaling visibility: 32 meters

Luminaire description

- LYRA EVO 32M 1H NM/M IP40 ENERGY TEST

Technical characteristics

- Test button
- Function: Energy Test (Self-contained with self-diagnosis)
- Duration: 1h
- Type: NM/M (Non-Maintained/Maintained)
- Maintained mode can be turned on/off with an external switch
- Battery: Ni-Cd 4,8V 0,5Ah
- Battery type: Nickel Cadmium
- Recharge time: 12h
- Battery status: battery disconnection warning
- Power supply: 230Vac
- Input power with charged battery: 1,7W
- Insulation class: II
- Protection degree: IP40
- Protection degree against mechanical impacts: IK08
- Working temperature: 0°C to +40°C
- Colour: Grey
- Signaling visibility (EN 1838): 32 meters
- Compliant to European standards: EN 60598-1, EN 60598-2-22, EN 1838, EN 7010
- Photobiological safety exempt group according to EN 62471
- Compliant to RoHS2 2011/65/UE
- Glow wire 850 °C
- Kit of pictograms included
- Installation: ceiling, flag-style, recessed*, 503 box recessed*, suspended* (* with accessory)
- 5 year warranty

Light source characteristics

- Type: LED
- Lamps: 16 LED
- Color temperature: 6000K



An UNI EN ISO 9001 certified company

LINERGY Srl - Via A. De Gasperi, 9 - 63075 Acquaviva Picena (AP) - ITALY - Tel. +39 0735 5974 - Fax +39 0735 597474 - www.linergy.it - info@linergy.it

Subject to change without notice. 14/05/2021

TECHNICAL SHEET

Signalling luminaire

LYRA EVO

Item code **LV1303**

Descriptive code **LV32N10ABRT**

Standard accessories



A031
CLASP FOR FLAG-STYLE FASTENING LYRA EVO



A033
CLASP FOR CEILING FASTENING LYRA EVO



A163
4 PICTOGRAMS KIT FOR ORION AND LYRA EVO 32 M

Mounting accessories



A016
PROTECTIVE GRATING



A032
CLASP FOR WALL FASTENING LYRA EVO



A034
KIT FOR FALSE CEILING WITH INOX STEEL SHEET



A035
KIT FOR SUSPENSION INSTALLATION LYRA EVO



A283
PICTOGRAM FOR LYRA EVO 32M DOWN DIRECTION LEFT



A284
KIT FOR FALSE CEILING WITH WHITE METAL SHEET

Commander



A350
CONTROLLER FOR THE REMOTE MANAGEMENT OF REST MODE



An UNI EN ISO 9001 certified company

LINERGY Srl - Via A. De Gasperi, 9 - 63075 Acquaviva Picena (AP) - ITALY - Tel. +39 0735 5974 - Fax +39 0735 597474 - www.linergy.it - info@linergy.it

Subject to change without notice. 14/05/2021