




# C10-S1 150×1200 LED 3300DALI 830 SU

A surface mounted or suspended luminaire displaying classic style. The luminaire housing is supplied in painted steel with synthetic end caps.

Item No.	C10081628
GTIN	7054130816287
Stock status	A

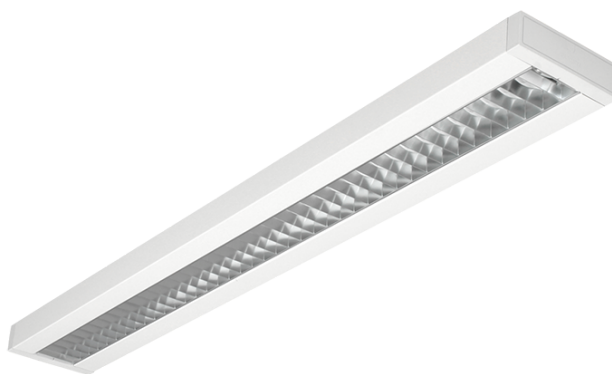

## Technical specifications

### General

Product shape	Rectangular
---------------	-------------

### Certificates

Certification	ENEC
---------------	------

### Technical Data

Minimum TA (°C)	-20
Maximum TA (°C)	50

### Light Technical Data

Light source	LED
Lumen Out (lm)	3372
Lumen Per Watt (lm/W)	120
Lamp colour temp (K)	3000
Colour Rendering Index	80
MacAdams Step	3
Energy Class Light Source	C

### Driver / Ballast

Type of LED Driver	DALI
Number of Driver	1

### Lifetime

LED Lifetime L80B50 Ta25 (h)	100 000
Lamp Lumen Maintenance Factor	0.90

### Electrical Data

Main Feed AC (V) Min	220
Main Feed Voltage AC max	240
Main Feed Frequency Min	50
Main Feed Frequency Max	60
Total Consumption (W)	26
Number Of Luminaire MCB 10B	15
Number Of Luminaire MCB 10C	25
Number Of Luminaire MCB 16B	24
Number Of Luminaire MCB 16C	40
Leakage Current (mA)	0.21

### Optic

Optic Name	SU - Soft light louvre
Reflector Material	Aluminium

### Housing

Body Material	Steel
Body Colour	White

### Dimensions

Length (mm)	1237
Width (mm)	154
Height (mm)	52
Item Net Weight (kg)	2.9624

### Termination

Termination	5×2×2.5mm <sup>2</sup> Push In
-------------	--------------------------------

### Mounting

Mounting Accessories	Need MNT
Product Mounting	Ceiling Surface

### Logistic Data

Item Gross Weight (kg)	3.22
------------------------	------

