



Product range >> Current transformers for industry >> Three-phase current transformer set (ASRD/ASK(D)/ASKD/WSKD)

art. nr.: D205-012

ASRD 205.37 3X200/5A 1.5VA Cl.1



Electrical Attributes:

Primary current:	3 x 200 A
Secondary current:	5 A
Burden:	1,5 VA
Class:	1

Dimensions:

Bus bar 1:	20 x 5 mm
Round conductor:	18 mm
Width:	115 mm
Height:	65 mm
Depth:	37 mm

Technical details:

Therm. nominal continuous current I_{cth} : $1,0 \times I_N$
Therm. nominal short-time current I_{th} : $60 \times I_N$, 1 sec.
Max. operating voltage U_m : 0.72 kV
Isolation test voltage: 3 kV, U_{eff} , 50 Hz, 1 min.
Nominal rated frequency: 50 Hz
Isolation class: E

Further information:




Over-current limiting factor:	See rating plate
Working temperature range:	$-5^\circ\text{C} < T < +40^\circ\text{C}$
Storage temperature range:	
Unbreakable plastic housing made of black polycarbonate:	Flame resistant, ultrasonically welded
Nickel-plated secondary terminals with plus-minus nickel-plated screws:	M5x10 mm
Secondary caps:	integrated
Package quantity:	1 pcs.
Custom tariff number:	85043129



MBS AG 'Sulzbach Messwandler'



Dimensions:

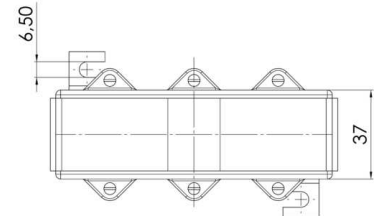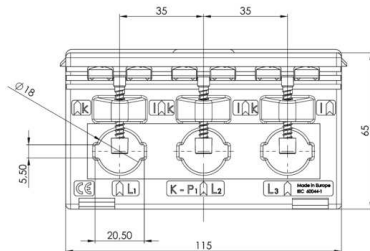

Contact:

MBS AG
Sulzbach Messwandler
Eisbachstraße 51
D-74429 Sulzbach-Laufen

Tel.: +49 7976 9851-0
Fax: +49 7976 9851-90
orders@mbs-ag.com

