

Product datasheet

HALOPIN PRO 20 W 230 V G9

HALOPIN PRO | Halogen lamps with G9 base



- General illumination Workplace lighting Lighting for reading Dining table lighting Mirror lighting Accent lighting Mood lighting

- Brilliant accent lighting Incredibly small dimensions for revolutionary new luminaire designs Robust filament design thanks to innovative, unique bulb pinch technology Approved for use in open luminaires (to IEC 60598-1) UV filter Complies with IEC 60432-2 thanks to integrated fuse function Lower thermal output (compared with the standard reference product)



Product datasheet

Technical data

Electrical data

Nominal wattage	20.00 W
Nominal voltage	230 V
Rated wattage	20.00 W
Claimed equiv. conventional lamp power	25 W


Photometrical data

Nominal luminous flux	235 lm
Rated color temperature	2700 K
Light color (designation)	Warm White
Rated luminous flux	235 lm
Color rendering index Ra	100
Color temperature	2700 K
Luminous flux	235 lm

Light technical data

Starting time	0.0 s
---------------	-------

Dimensions & weight



Diameter	14.0 mm
Length	43.0 mm
Light center length (LCL)	22.0 mm
Overall length	43.0 mm
Outer bulb	T13,3
Product weight	2.90 g

Lifespan

Product datasheet

Rated lamp life time	2000 h
Number of switching cycles	50000

Additional product data

Base (standard designation)	G9
Mercury-free	Yes

Capabilities

Burning position	Any
Dimmable	Yes


Certificates & standards

Energy efficiency class	G
Energy consumption	20 kWh/1000h

Country specific categorizations

ILCOS	HSGST/C/UB-20-230-G9-22
Order reference	66720 PRO 20W 2

Light Distribution

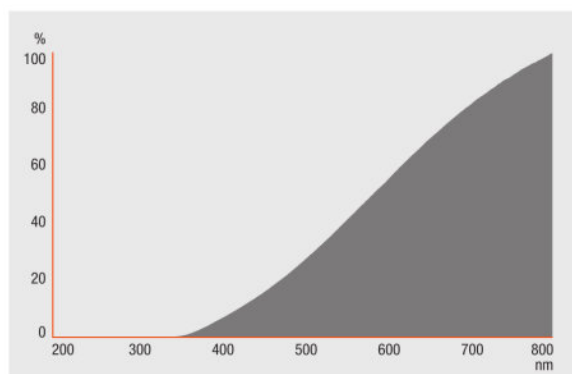

HAL_HV_UVS

Product datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321786975	HALOPIN PRO 20 W 230 V G9	Shipping carton box 2500 Pieces Folding carton box	410 mm x 310 mm x 435 mm	55.29 dm ³	16875.00 g
4008321945273	HALOPIN PRO 20 W 230 V G9	Shipping carton box 20 Pieces Folding carton box	144 mm x 55 mm x 118 mm	0.93 dm ³	126.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany