

# Product datasheet

## DULUX D 26 W/830

OSRAM DULUX D | CFLni, 2 tubes, with 2-pin base for CCG operation



– Offices, public buildings Shops Supermarkets and department stores Hotels, restaurants Industry

– Extremely economical Good quality of light Excellent luminous flux Long service life Improved maintenance



## Technical data

### Electrical data

Nominal wattage	26.90 W
Nominal voltage	105 V
Rated wattage	26.90 W
Nominal current	0.33 A

### Photometrical data

Nominal luminous flux	1750 lm
Light color (designation)	LUMILUX Warm White
Luminous flux at	1800 lm
Rated luminous flux	1750 lm
Rated color temperature	3000 K
Color rendering index Ra	≥80
Color temperature	3000 K
Luminous flux	1750 lm
Color rendering index Ra	80...89

### Dimensions & weight



Diameter	12.0 mm
Overall length	172.0 mm
Length	172.0 mm
Length acc. to IEC standard	160 mm
Length with base excl. base pins/connection	149.00 mm
Outer bulb	T12X2
Product weight	43.00 g

### Lifespan

## Product datasheet

Rated lamp life time	10000 h
Service life	6500 h
Lifespan	10000 h <sup>1)</sup>
Nominal lamp life time	10000 h

<sup>1)</sup> With CCG/LLCG

### Additional product data

Base (standard designation)	G24d-3
Mercury content	1.6 mg
Appropriate disposal acc. to WEEE	Yes

### Capabilities

Dimmable	No
----------	----


### Certificates & standards

Energy efficiency class	G
Energy consumption	27 kWh/1000h

### Country specific categorizations

ILCOS	FSQ-26/830-I-G24d-3
Order reference	DULUX D 26W/830


Light Distribution

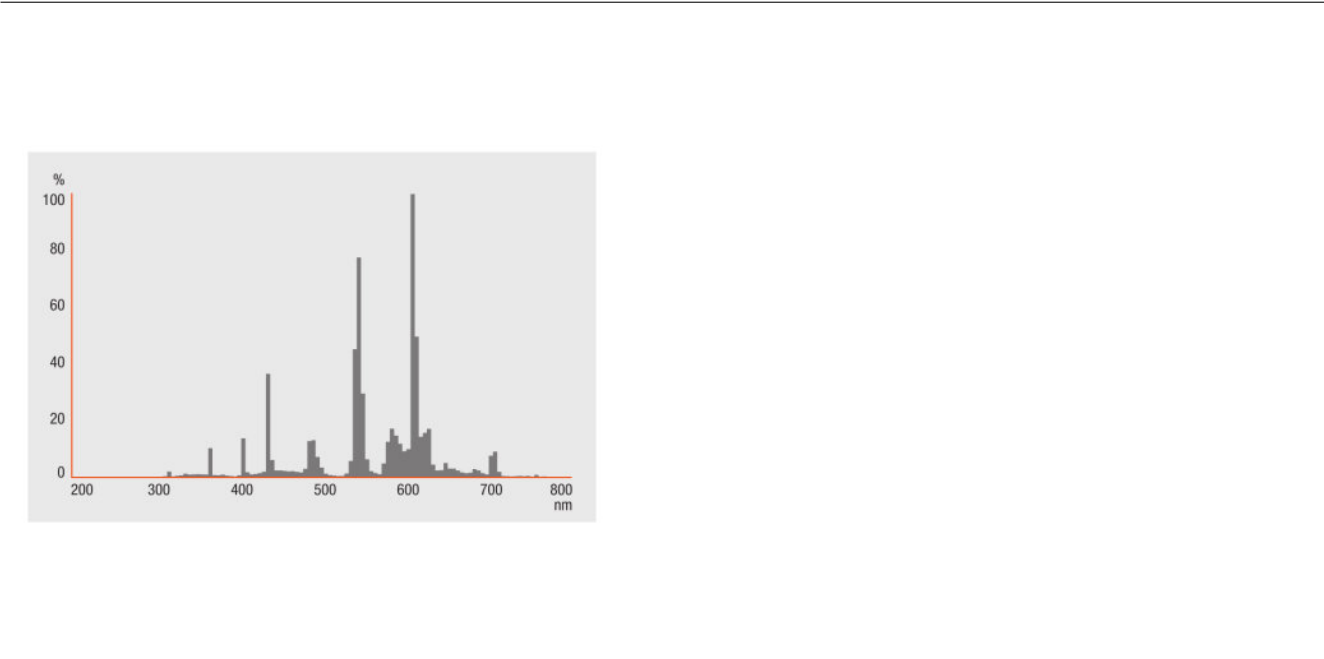

FL\_830

Equipment / Accessories

- Suitable for operation on conventional control gear



SINGLE LAMP WITH CONTROL GEAR

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
--------------	---------------------	---------------------------------	---	--------	--------------

Product datasheet

4050300025711	DULUX D 26 W/830	Shipping carton box 10 Pieces Folding carton box	135 mm x 162 mm x 167 mm	3.65 dm <sup>3</sup>	695.00 g
---------------	------------------	--	-----------------------------	----------------------	----------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner  
of LEDVANCE of LAMPS

**OSRAM**

OSRAM GmbH  
Marcel-Breuer-Strasse 6  
80807 Munich, Germany