

# D01 gG 10A/400V



## Specifications

ETI Code	002211004
Description	D01 gG 10A/400V
Weight	6.6
Level	Fuse links gG
Rated current (A)	10
Type	D0
Size	D01
Characteristics	gG
Rated AC voltage (V)	400
Rated DC voltage (V)	250
Dimensions	E14
Indicator	Top fuse status indicator
Breaking capacity AC (kA)	50
Breaking capacity DC (kA)	8
Standards	DIN EN 60269-1, DIN EN 60269-3
Application	For cable protection
Application	For cable protection
Indicator	Top fuse status indicator
Dimensions	E14
Breaking capacity DC (kA)	8
Breaking capacity AC (kA)	50
Standards	DIN EN 60269-1, DIN EN 60269-3

Online product page

## Other documentation




Technical data catalogue  
EU declaration



## ETIM international classification


Application	For cable protection
Nominal rated current	10A
Nominal rated voltage	400V
Colour code	Red
Construction size	D01
Type of fuse status indicator	Top fuse status indicator
Breaking capacity	50
Rated voltage at DC	250
Max. rated operation voltage Ue AC	400

## Cut-off current characteristics

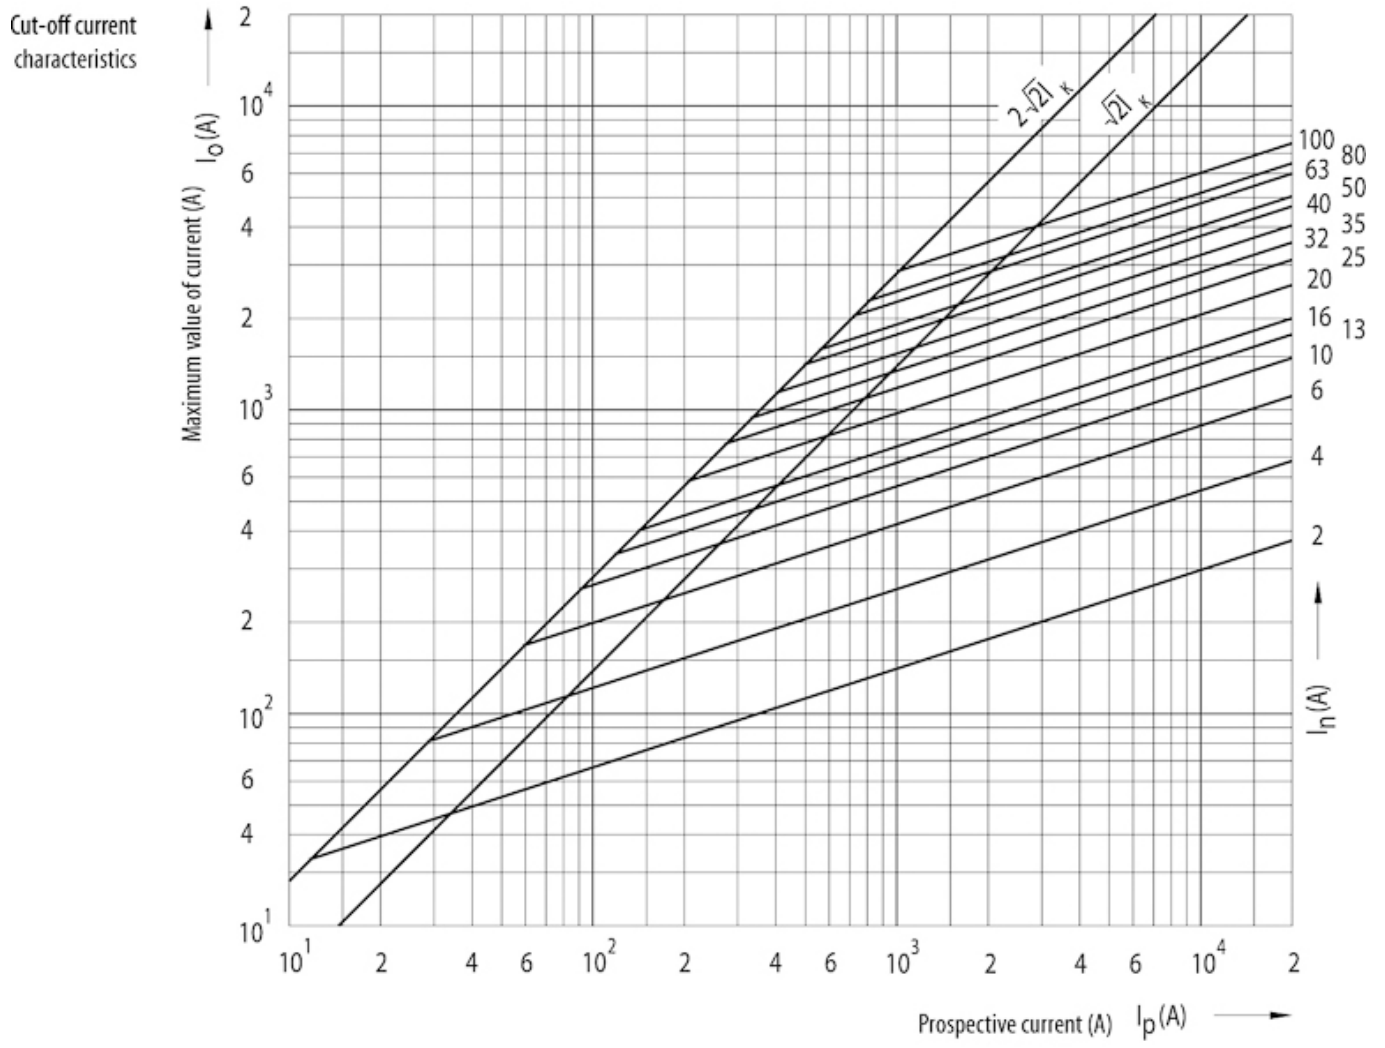


# Melting energy characteristics


Melting energy characteristics  $I^2t$

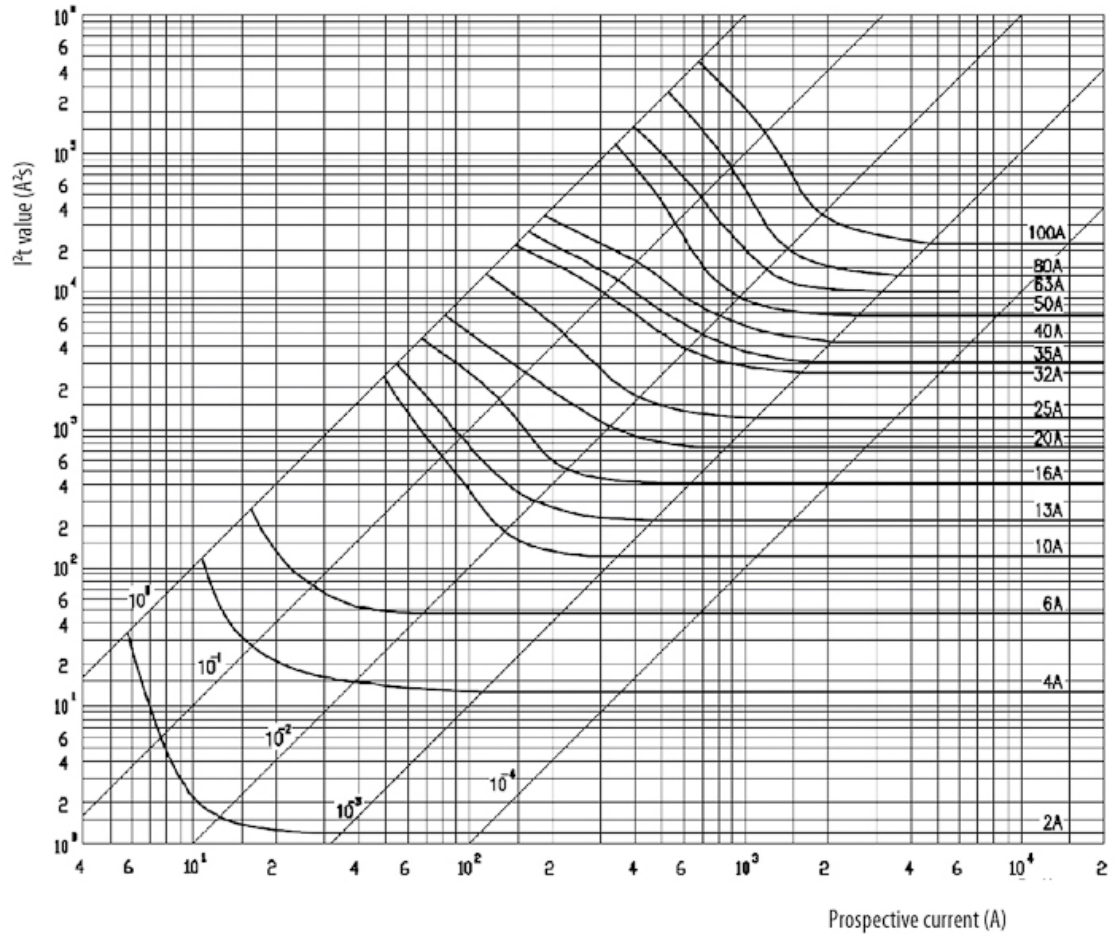

# Time current characteristics

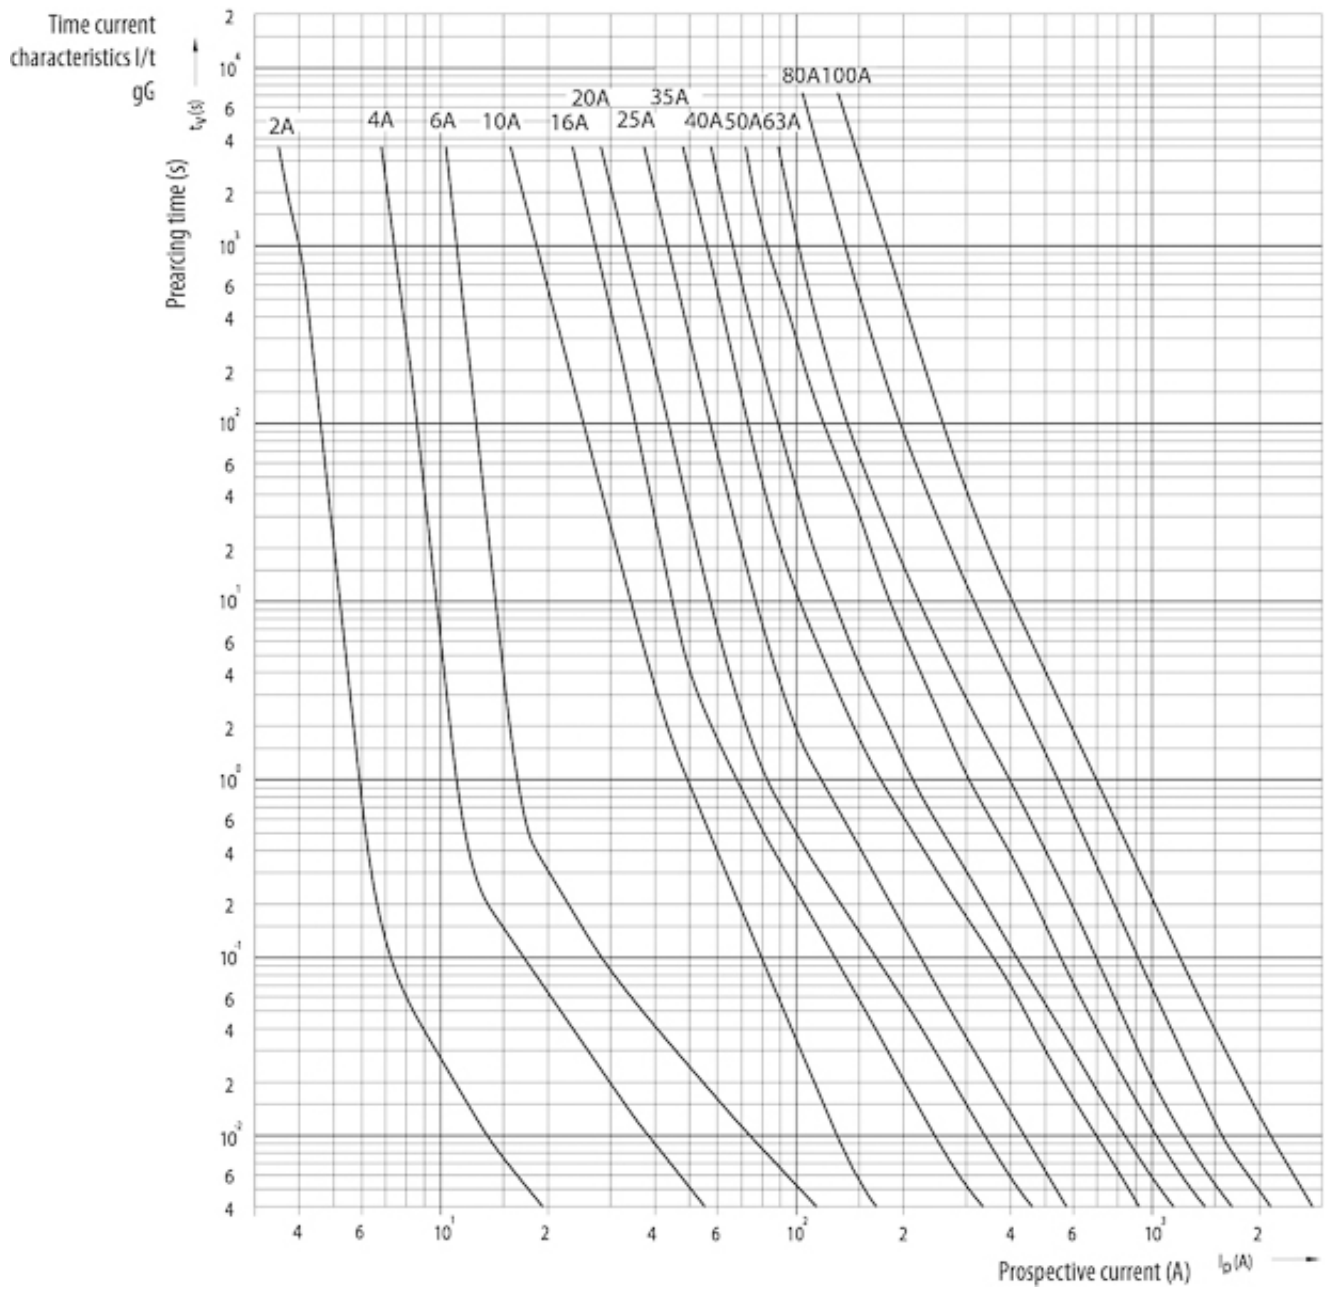

## Dimension drawing

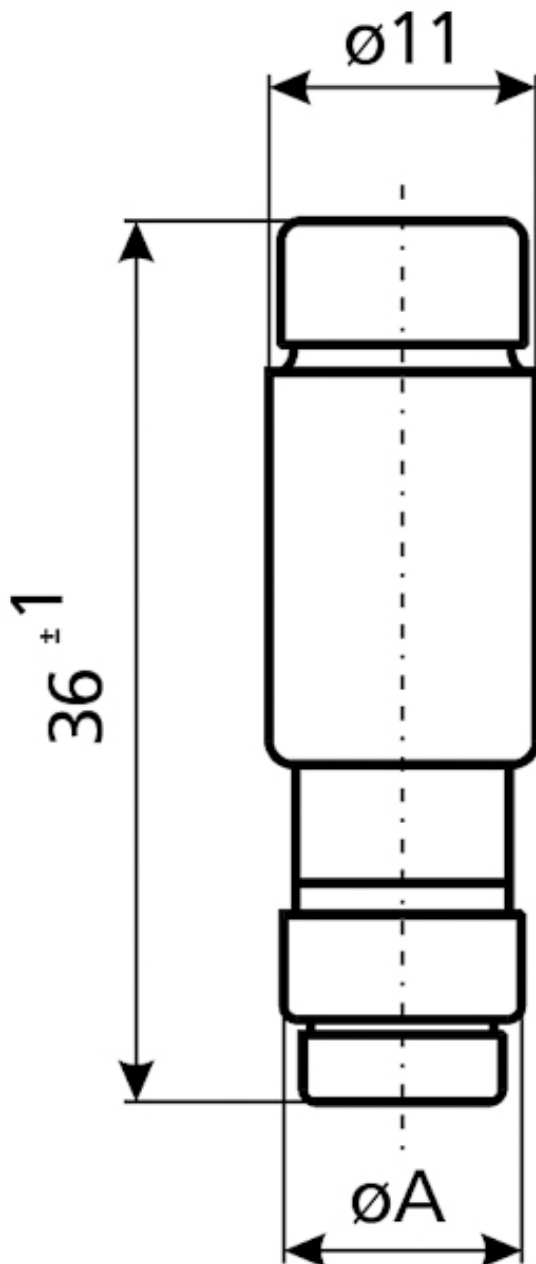

$l_n$ [A]	$\text{Ø}A$
2	7,3
4	7,3
6	7,3
10	8,5
13	8,5
16	9,7