

# DIII gG 63A/500V



## Specifications

ETI Code	002313403
Description	DIII gG 63A/500V
Weight	51
Level	Fuse links gG
Rated current (A)	63
Type	D
Size	DIII
Characteristics	gG
Rated AC voltage (V)	500
Rated DC voltage (V)	250
Dimensions	E33
Indicator	Top fuse status indicator
Breaking capacity AC (kA)	50
Breaking capacity DC (kA)	8
Standards	DIN EN 60269-1, DIN EN 60269-3
Application	For cable protection
Breaking capacity AC (kA)	50
Breaking capacity DC (kA)	8
Dimensions	E33
Indicator	Top fuse status indicator
Standards	DIN EN 60269-1, DIN EN 60269-3

[Online product page](#)

## Other documentation



[Technical data catalogue](#)  
[COM\\_PRODUCT\\_Certificate](#)  
[EU declaration](#)




## ETIM international clasification


Application	For cable protection
Nominal rated current	63A
Nominal rated voltage	500V
Release characteristic	Time-lag
Colour code	Copper
Construction size	DIII
Type of fuse status indicator	Top fuse status indicator
Breaking capacity	50
Rated voltage at DC	250




## Cut-off current characteristics

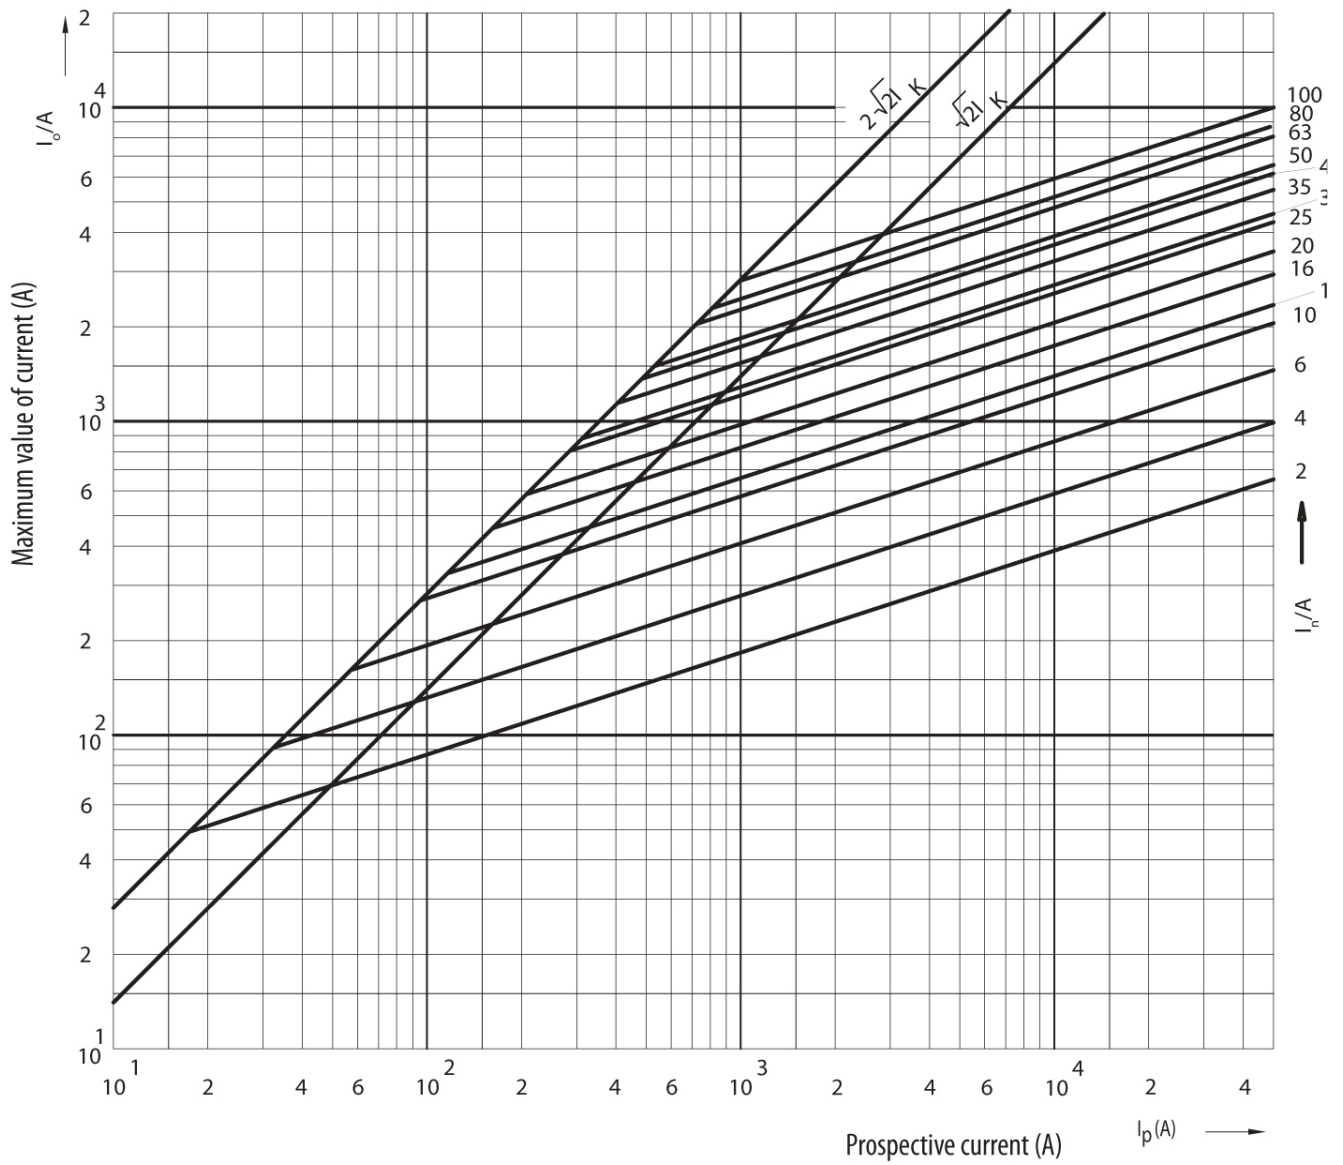

# Melting energy characteristics

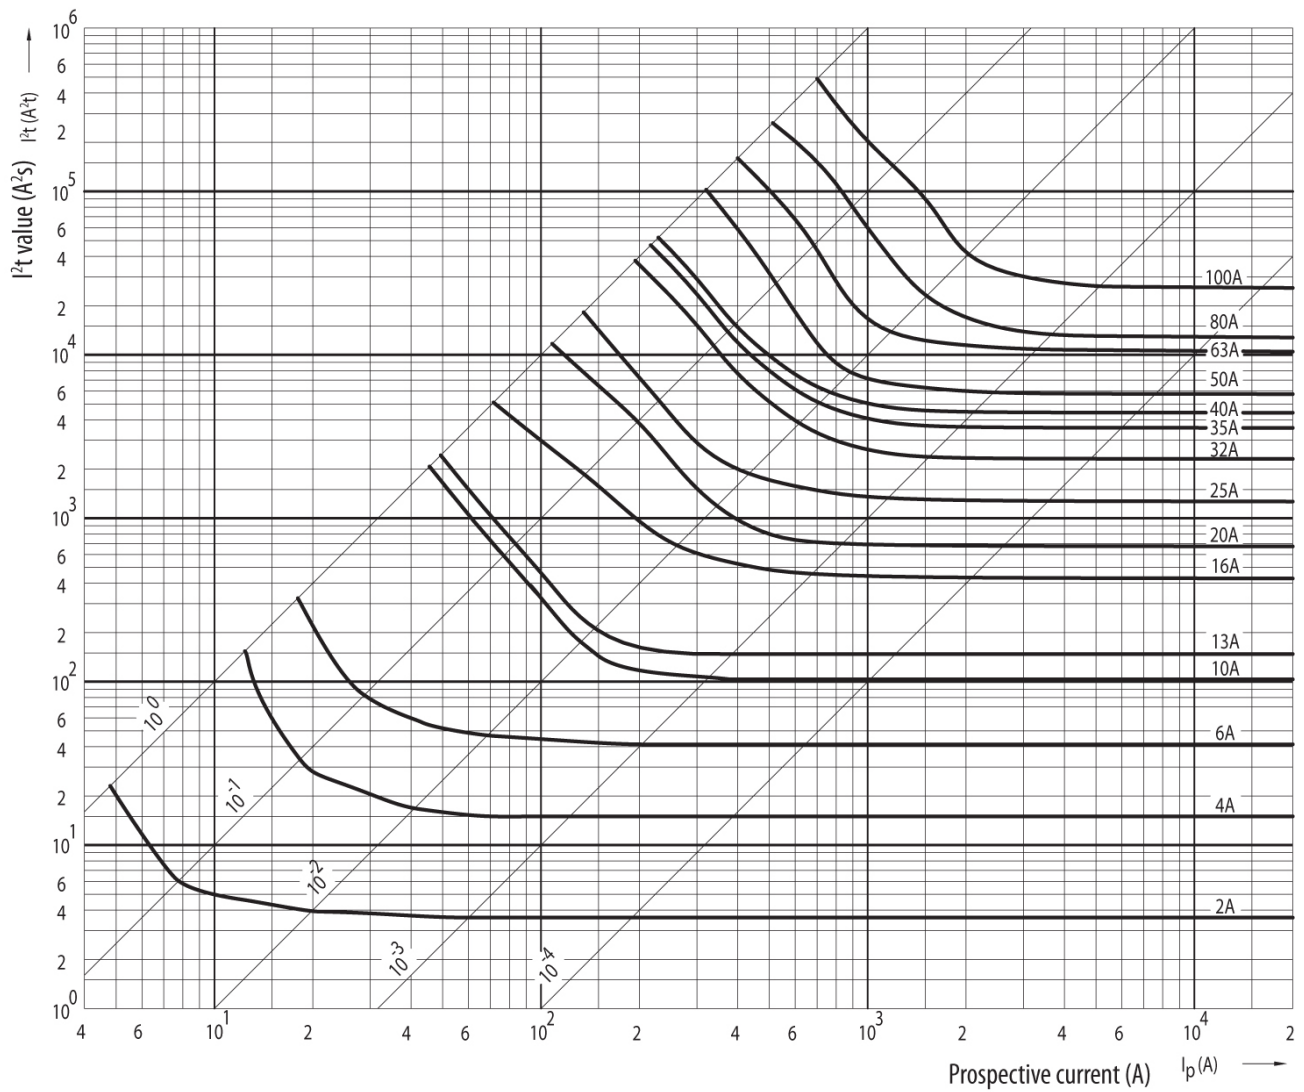

## Dimension drawing

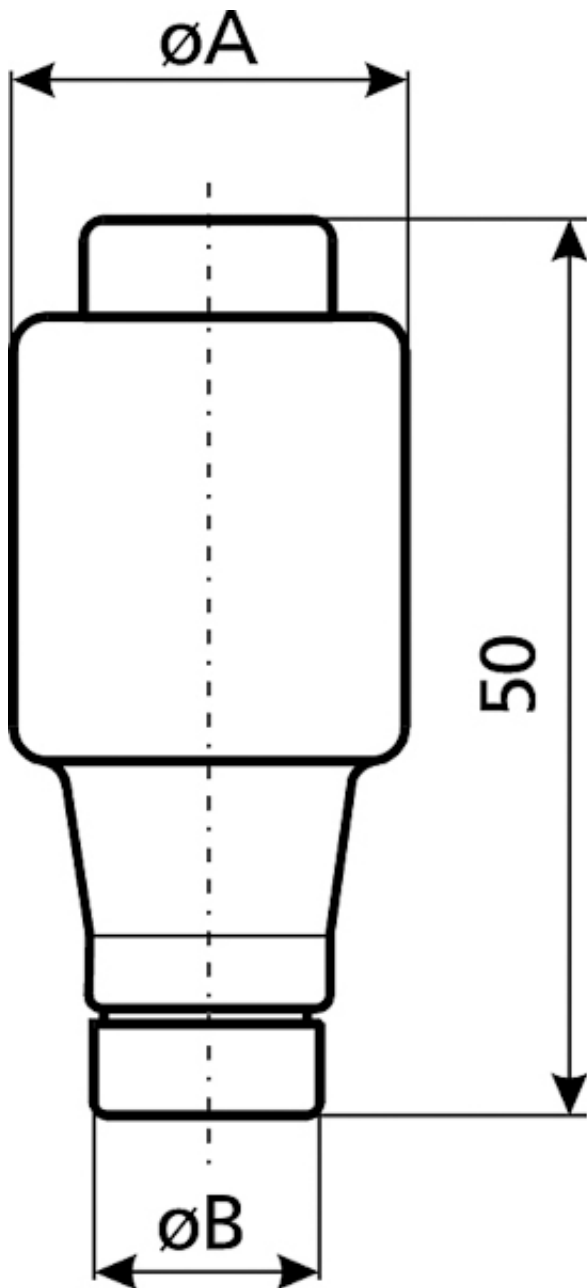

[A]	$\varnothing A$	$\varnothing B$
32	27	16
35	27	16
40	27	16
50	27	18
63	27	20