# SYN 161 d Item no.: 1610011



#### Time and light control Analogue time switches

#### Description

- Analogue time switch
- 1 channel
- Daily program
- Without power reserve
- 96 switching segments
- Synchronised with mains
- Shortest switching time: 15 minutes
- Clock hands for time display and in addition 12/24 hour recognition
- Simple summer/winter time correction
- Time can be changed clockwise or anti-clockwise
- DuoFix spring terminals
- For 2 conductors each
- Wire or strand (with or without wire end sleeve)
- Wire diameter: 0.5 2.5  $\rm mm^2$
- Button for releasing plug-in connection
- Switching preselection
- Manual switch with 3 positions: Continuous ON/AUTO/continuous OFF
- Switching status display



#### **Technical data**

|  | SYN 161 d               |
|--|-------------------------|
| Operating voltage                                  | 230 V AC                |
| Frequency  | 50 Hz                   |
| Number of channels                                 | 1                       |
| Width  | 3 modules               |
| Installation type                                  | DIN rail                |
| Type of connection                                 | DuoFix spring terminals |
| Drive  | Synchronous motor       |
| Program  | Daily program           |
| Switching capacity at 250 V AC, $\cos \varphi = 1$ | 16 A                    |

|  | SYN 161 d               |
|--|-------------------------|
| Switching capacity at 250 V AC, $\cos \varphi = 0,6$ | 4 A                     |
| Incandescent/halogen lamp load                       | 1100 W                  |
| LED lamp < 2 W                                       | 20 W                    |
| LED lamp 2-8 W                                       | 180 W                   |
| LED lamp > 8 W                                       | 180 W                   |
| Shortest switching times                             | 15 min                  |
| Programmable every                                   | 15 min                  |
| Time accuracy at 25 °C                               | Synchronised with mains |
| Type of contact                                      | Changeover contact      |

# SYN 161 d Item no.: 1610011




## Technical data

|                              | SYN 161 d                                |
|------------------------------|--|
| Switching output             | Potential-free and phase-<br>independent |
| Number of switching segments | 96                                       |
| Stand-by consumption         | ~0.5 W                                   |
| Capacity loss max.           | 1.3 W                                    |
| Test approval                | VDE                                      |

|                                 | SYN 161 d  |
|---------------------------------|--|
| Housing and insulation material | High-temperature resistant, self-<br>extinguishing thermoplastic |
| Type of protection              | IP 20  |
| Protection class                | II according to EN 60 730-1                                      |
| Ambient temperature             | -20°C 55°C   |


## Connection example




# SYN 161 d Item no.: 1610011



Scale drawings

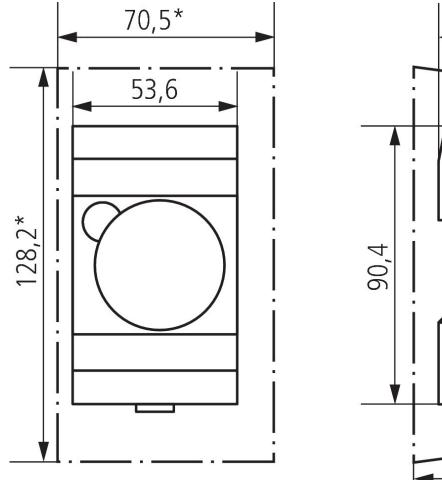


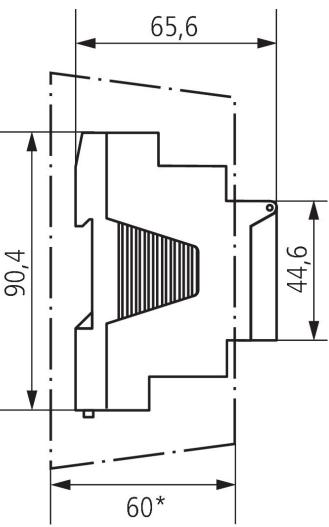

### Accessories

Wall mounting kit 52,5 mm Item no.: 9070050







Subject to technical changes and misprints additional information at: www.theben.de/product/1610011 The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.