

# thePassa P360 Slave UP WH

Item no.: 2010330

**theben**

## Presence and motion detectors Indoor detectors

### Description

- Passive infra-red presence detector for flush-mounted ceiling installation
- Rectangular detection area 360°, 30 x 4,5 m, (135 m²) at mounting height 3 m, for corridors and storage areas, with 2 individually connectable and disconnectable detection zones
- Slave version for thePassa master presence detectors
- Test mode for checking function and detection area
- Extension of detection area via Master/Slave or Master/Master switching, a maximum of 10 detectors can be switched in parallel with each other
- Ceiling installation in flush-mounted socket
- Ceiling installation also possible with surface-mounted frame
- User remote control theSenda S, management remote control SendoPro (optional)



### Technical data

thePassa P360 Slave UP WH	
Operating voltage	110 – 230 V AC
Frequency	50 – 60 Hz
Installation height	2 – 6 m
Maximum height	15 m
Minimum height	> 1,7 m
Installation type	Ceiling installation
Colour	White
Switching output	Slave
Power consumption	ca. 0.1 W


thePassa P360 Slave UP WH	
Light measurement	Mixed light measurement
Type of connection	Screw terminals
Max. cable cross section	max. 2 x 2,5 mm²
Size of concealed housing	Ø 55 mm (NIS, PMI)
Detection range	150 m² (30,0 x 5 m)
Detection angle	360°
Ambient temperature	-15°C ... 50°C
Type of protection	IP 54 (when fitted)

Subject to technical changes and misprints

additional information at: [www.theben.de/product/2010330](http://www.theben.de/product/2010330)


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

Connection example

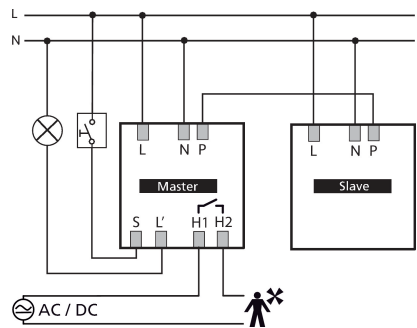

Detection range for planning applications at a temperature of 21 °C

Mounting height (A)	Diagonally (t)	Head on to (R)
2 m	56 m²   16 m x 3.5 m	56 m²   16 m x 3.5 m
2.5 m	88 m²   22 m x 4 m	72 m²   18 m x 4 m
3 m	135 m²   30 m x 4.5 m	90 m²   20 m x 4.5 m
3.5 m	150 m²   30 m x 5 m	100 m²   20 m x 5 m
4 m	150 m²   30 m x 5 m	100 m²   20 m x 5 m
4.5 m	150 m²   30 m x 5 m	100 m²   20 m x 5 m
5 m	150 m²   30 m x 5 m	100 m²   20 m x 5 m
5.5 m	150 m²   30 m x 5 m	100 m²   20 m x 5 m
6 m	150 m²   30 m x 5 m	100 m²   20 m x 5 m

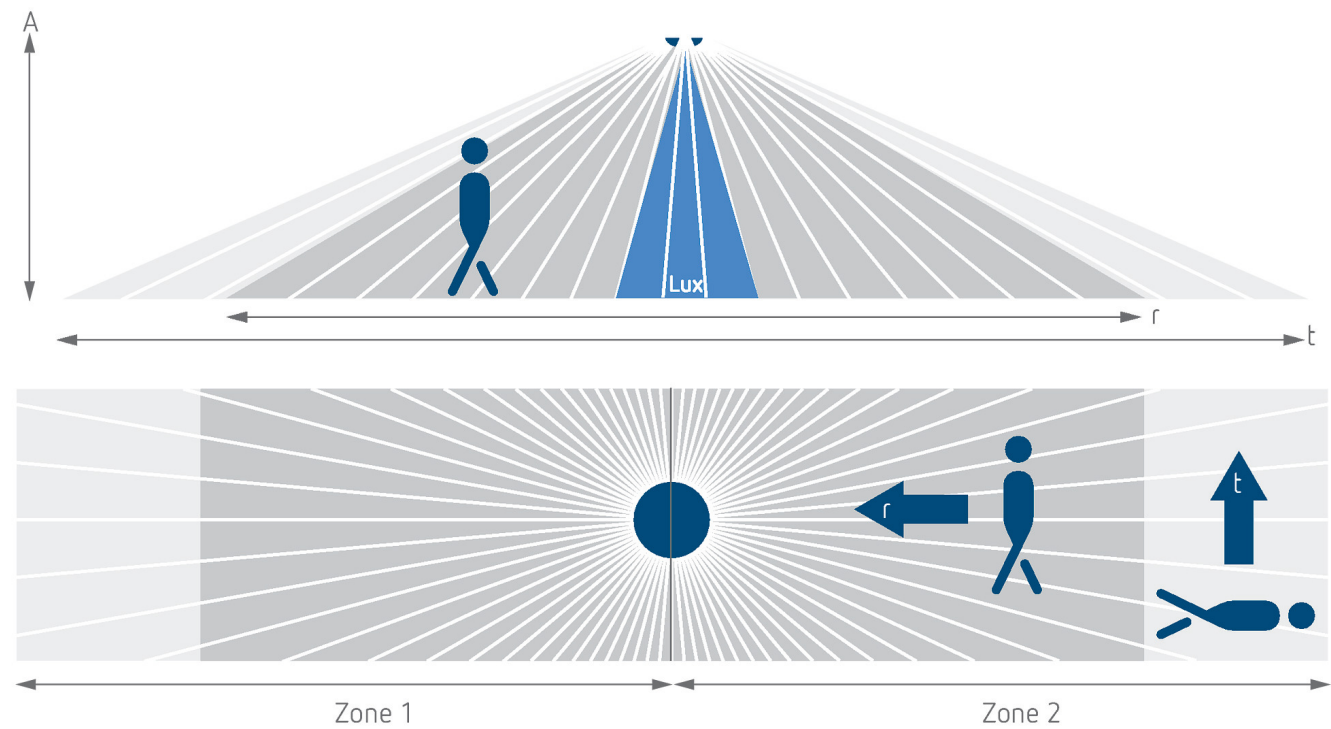

Subject to technical changes and misprints

additional information at: [www.theben.de/product/2010330](http://www.theben.de/product/2010330)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# thePassa P360 Slave UP WH


Item no.: 2010330



## Detection range according to Sensnorm IEC 63180

Mounting height (A)	Diagonally (T)	Head on to (R)
2.5 m	215 m²   43 m x 5 m	62 m²   14.8 m x 4.2 m
6 m	550 m²   50 m x 11 m	495 m²   45 m x 11 m
15 m	800 m²   40 m x 20 m	600 m²   30 m x 20 m

## Scale drawings

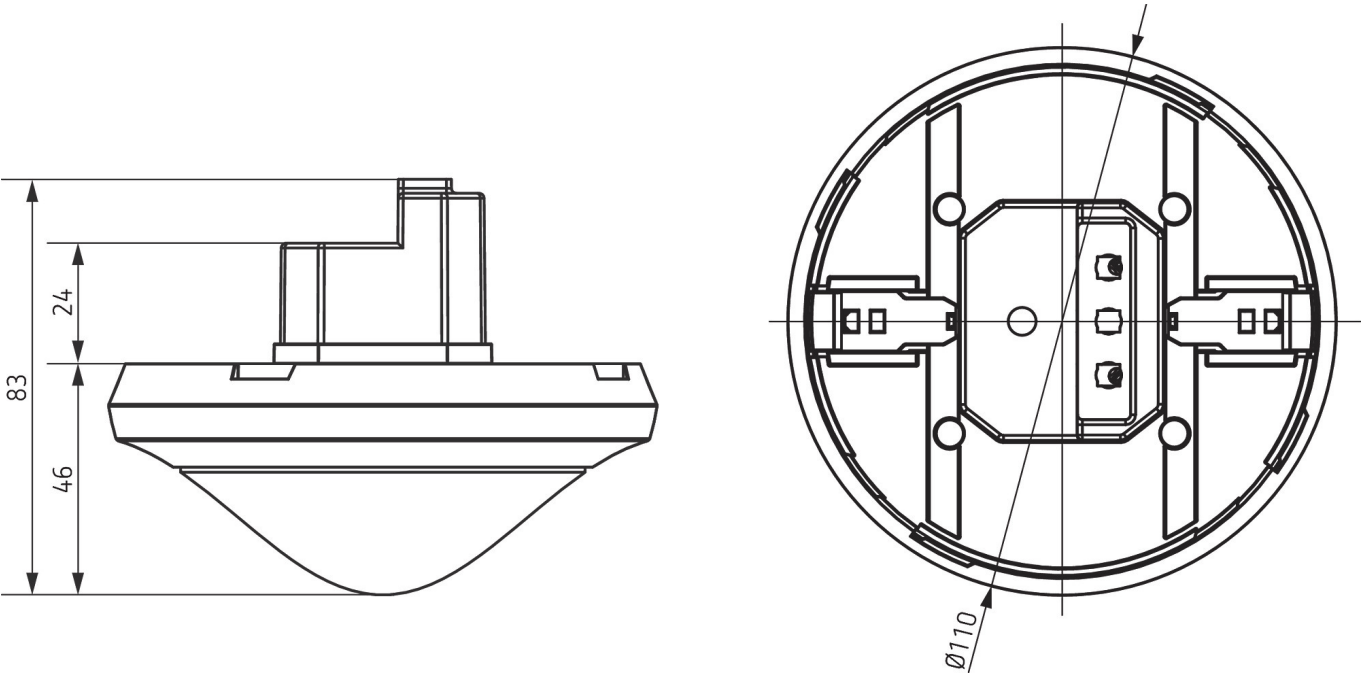

## Accessories

theSenda P  
Item no.: 9070910



theSenda S  
Item no.: 9070911



Surface frame 110A WH  
Item no.: 9070912



Masking clip  
Item no.: 9070921



# thePassa P360 Slave UP WH


Item no.: 2010330

**theben**

## Accessories

### QuickSafe

Item no.: 9070531



### theSenda B

Item no.: 9070985



### Cover 110 GR

Item no.: 9070591



### Ceiling installation box 68A

Item no.: 9070992



### Surface frame 110A BK

Item no.: 9070600



### Cover 110 BK

Item no.: 9070851



Subject to technical changes and misprints

additional information at: [www.theben.de/product/2010330](http://www.theben.de/product/2010330)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

11/10/2022

Page 4 of 4