



ZV7H235-11Z-M20

- Metal enclosure
- 30 mm x 63,5 mm x 30 mm
- 1 Cable entry M 20 x 1.5
- only for positioning tasks
- Mounting details to EN 50047
- Wide range of alternative actuators
- Lever angle adjustable in 10° steps
- Good resistance to oil and petroleum spirit
- Actuator heads can be repositioned by 4 x 90°
- Snap action with constant contact pressure up to switching point

Data

Ordering data

Product type description	ZV7H 235-11Z
Article number (order number)	101168066
EAN (European Article Number)	4030661220437
eCl@ss number, Version 9.0	27-27-06-01

Certifications

Certificates	cULus
	CCC
	EAC

General data

Product name	Z 235 roller lever 7H
Standards	IEC 60947-5-1 ISO 13849-1 BG-GS-ET-15
Housing construction form	Norm construction design
Enclosure material	Zink
Enclosure coating material	painting
Material of the contacts, electrical	Silver
Lever material	Metal film
Roller material	Plastic
Weight	225 g

General data - Features

Number of auxiliary contacts	1
Number of safety contacts	1

Safety appraisal

Standards	ISO 13849-1
Mission Time	20 Year(s)

Safety appraisal - Safety outputs

B10d Normally-closed contact (NC)	20,000,000 Operations
-----------------------------------	-----------------------

Mechanical data

Actuating element	Roller lever
Mechanical life, minimum	20,000,000 Operations
Actuating speed, minimum	240 mm/min
Actuating speed, maximum	1 m/s
Note (Actuating speed)	Actuating speed with actuating angle 30° to switch axis
Actuating torque, minimum	0.15 Nm

Mechanical data - Connection technique

Terminal Connector	Screw connection
Cable section, minimum	0.75 mm ²
Cable section, maximum	2.5 mm ²
Note (Cable section)	All indications about the cable section are including the conductor ferrules.
Wire cross-section	13 AWG

Mechanical data - Dimensions

Height of sensor	160.5 mm
Length of sensor	49 mm
Width of sensor	30 mm

Ambient conditions

Protection class	IP67
Ambient temperature, minimum	-30 °C
Ambient temperature, maximum	+80 °C

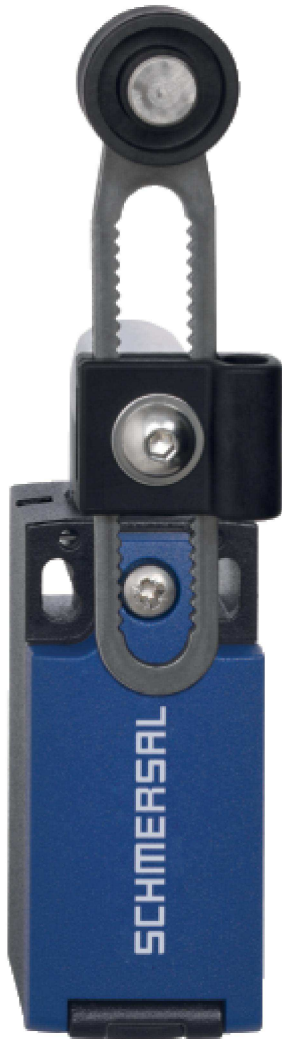
Ambient conditions - Insulation value

Rated impulse withstand voltage	6 kV
---------------------------------	------

Electrical data

Thermal test current	10 A
Required rated short-circuit current to EN 60947-5-1	1,000 A
Utilisation category AC-15	230 VAC
Utilisation category AC-15	4 A
Utilisation category DC-13	24 VDC
Utilisation category DC-13	1 A
Switching element	NO contact, NC contact
Switching principle	Snap switch element
Bounce duration, maximum	3 ms
Switching frequency	5,000 /h
Switchover time, maximum	5.5 ms

Documents**Operating instructions and Declaration of conformity****EC Declaration of conformity****UL Certificate**

PS215 roller lever N200

103014972 PS215-Z11-N200

- **only for positioning tasks**
- Lever angle adjustable in 15° steps
- Actuator heads can be repositioned by 8 x 45°
- Metal enclosure
- Design to EN 50047
- Quick connection technology as connection terminals rotated by 45°
- Simple and quick to adjust the control elements by 45°.
- cable entry 1 x M20 x 1,5
- length adjustable in 2 mm steps

K.A. Schmersal GmbH & Co. KG, Möddinghofe 3, D-42279 Wuppertal

The details and data referred to have been carefully checked. Images may diverge from original. Further technical data can be found in the manual. Technical amendments and errors possible.

Generated on 31.03.2020 17:47:44