


# MONOBLOCK INDUSTRIAL ENCLOSURE IP66 BRES-65

Polyester enclosure 600x 500 x230

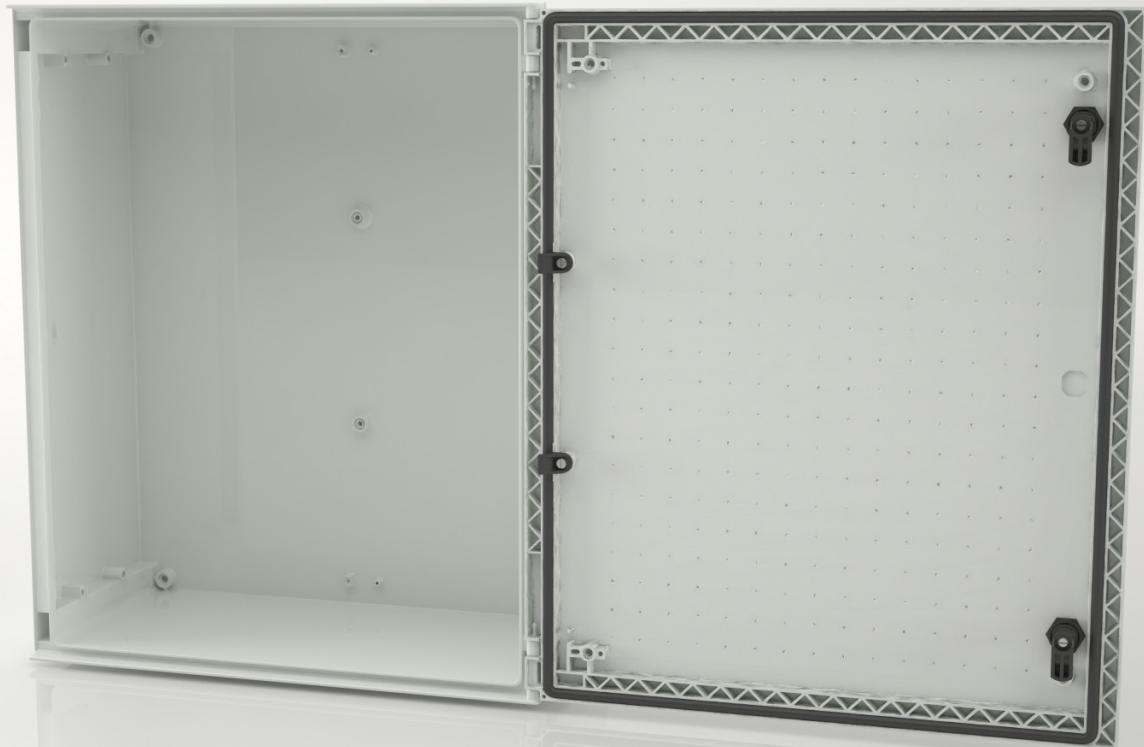

## Safybox

### Characteristics:

- Compression molded boxes & cabinets made from fiberglass-reinforced polyester. Comes in color RAL 7035 Light Grey.
- Self-extinguishing materials according to glow wire tests at 960° C, following UNE-EN-60695-2-10 Standards (IEC 60695-2-10).
- Thermal Class Material according to EN-IEC-60085 Standards. IP-66 rated protection according to UNE EN 60529 Standards (IEC 60529).
- IK-10 impact resistance according to EN 50102 Standards (IEC 62262). Its new door design features an increased impact resistance.
- The door may be opened to 180°. It may be installed with a left or right sided opening orientation thanks to its reversible design. It features a double bar lock insert or, optionally, a triple-point, vandalism-resistant locking mechanism. Its lightweight properties allow an effortless installation.
- Customization options for color, machining, installation accessories, locks, and laser printing for company logos. Polyester or metallic mounting plates may be attached as well.
- Over 10 years of maintenance-free lifespan under standard environmental conditions.

#### Code

BRES-65

#### Description

Empty standard enclosure colour light grey RAL 7035

#### Height x Width x Depth

600 x 500 x 230 mm

#### Weight




6,79 kg





# MONOBLOCK INDUSTRIAL ENCLOSURE IP66 BRES-65

Polyester enclosure 600 x 500 x 230 mm

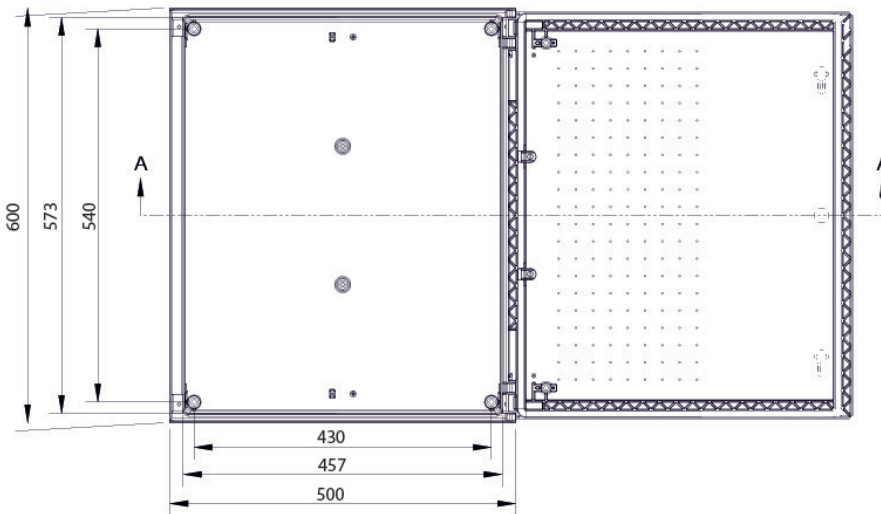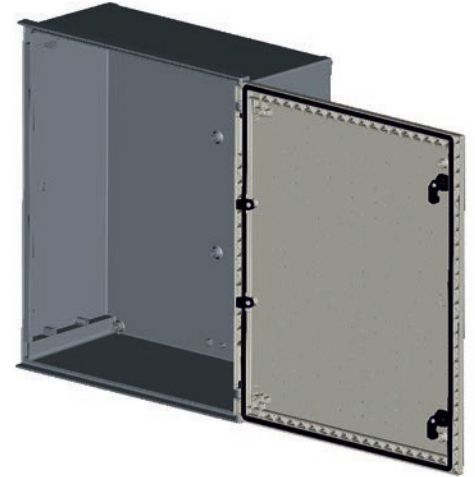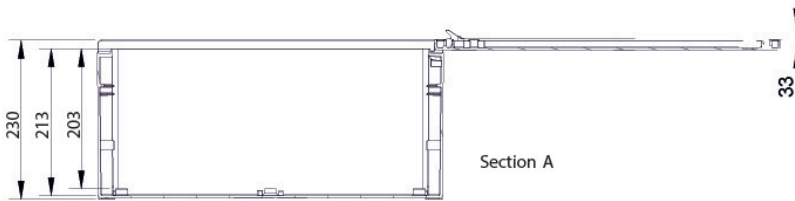

## Packaging

24 Units per pallet 120 x 80 cm (Height 210 cm)

## Maximum interior weight tolerance

Max weight 51 kg

## Environmental performance

Minimum temperature	-30°C	IP water protection rating IEC-60529	IP66
Maximum temperature	70°C	IK impact rating IEC-62262	IK10

## Electrical performance

Nominal tension on direct current up to:	1500
Nominal tension on alternating current up to:	1000
Maximum power dissipation $\Delta T=40^{\circ}C$ (wall installation)	117 W

## Installation & mounting system

Interior installation	Yes	Wall mounting	Yes
Exterior installation	Yes	Floor mounting	Yes
Flush mounting	Yes	Pole mounting	Yes

