


# CK Minikanäle, Hart PVC / CK Mini Trunkings, rigid PVC

Installationskanäle aus Hart-PVC / Installation Trunkings, rigid PVC

VDE   RoHS konform/compliant

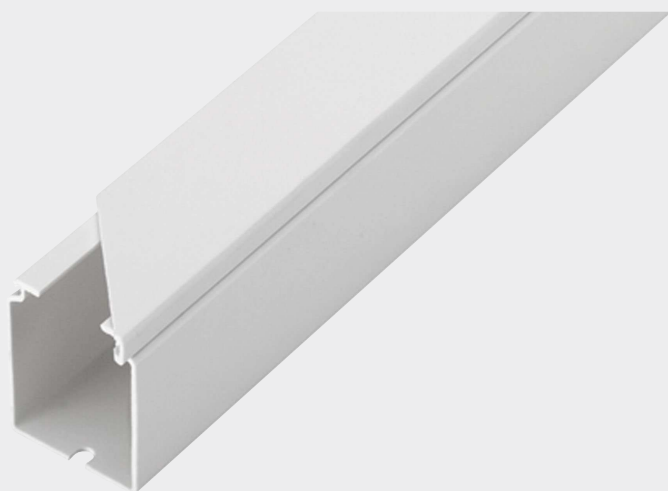

20 x 10



15 x 15



30 x 15



18 x 18



40 x 25



30 x 30

Material: Hart-PVC, schwer entflammbar,  
selbstverlöschend

## Besondere Merkmale:

- Farben ähnlich: weiß RAL 9001, reinweiß RAL 9010,  
lichtgrau RAL 7035
- Lieferumfang: Unterteil mit Bodenlochungen  
(Abstand 125 mm), inkl. Deckel, Länge 2 m

Material: rigid PVC, hardly-inflammable, self-extinguishing

## Specific Features:

- Colors similar: white RAL 9001, pure white RAL 9010,  
light grey RAL 7035
- Extent of supply: base with perforated bottom (distance  
125 mm), incl. cover, length 2 m

Farbe Colour	Abmessungen Dimensions B x H / W x H	Länge Length	VE PU	Artikel-Nr. Article-No.
RAL 9010	20 x 10	2 m	160	1255
RAL 9001	15 x 15	2 m	140	9000
RAL 7035	15 x 15	2 m	140	9004
RAL 9010	15 x 15	2 m	140	9005
RAL 9001	30 x 15	2 m	70	9010
RAL 7035	30 x 15	2 m	70	9014
RAL 9010	30 x 15	2 m	70	9015
RAL 9001	18 x 18	2 m	96	9007
RAL 7035	18 x 18	2 m	96	9008
RAL 9010	18 x 18	2 m	96	9009
RAL 9001	40 x 25	2 m	48	9020
RAL 7035	40 x 25	2 m	48	9024
RAL 9010	40 x 25	2 m	48	9025
RAL 9001	30 x 30	2 m	50	9030
RAL 7035	30 x 30	2 m	50	9034
RAL 9010	30 x 30	2 m	50	9035

## Data Sheet Installation Trunkings CK


Tested and certificated according to: DIN EN 50085-1 and DIN EN 50085-2-1

Stand: 05.2022

The installation trunkings of type CK are made of rigid PVC by extrusion.

### Characteristic:

Material:	rigid-PVC; lead-, silicon- und cadmium-free (RoHS conform)		
Operation temperature:	static:	-20°C... +60°C	
	dynamic:	-5°C... +60°C	
working temperature:	>0°C		
fire behaviour:	hard to inflame according to	DIN 4102-1	Level B1
	self-extinguishing according to	UL94	V0
	Fire load:	5,2kW/kg	
Dielectric strength:	>30kV/mm		
UV resistance:	Hard PVC is conditionally UV-resistant to a certain extent, (colour changes due to UV- exposure cannot be ruled out)		
Colour:	RAL 9001 cream white RAL 9010 pure white RAL 9016 traffic white RAL 7035 light grey RAL 7016 anthracite grey RAL 8014 sepia brown		
Delivery length:	2000 mm with cover		

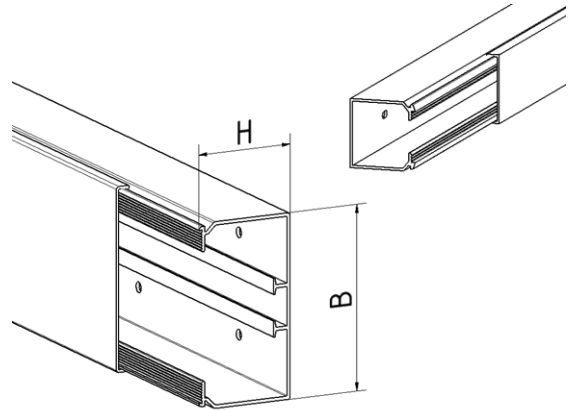

### Special features:

- CK trunkings are equipped with cable clamps from 60x40 mm and floor profiles to accommodate dividers from 60x60 mm.
- For CK trunkings from 60x40 mm, molded parts are available for the following purposes Part with flexible opening angle available.
- Bottom perforations at a distance of 125 mm for fixing to fixed structure.
- Accessories and further information can be found at [www.licatec.de](http://www.licatec.de)

CK	Height (H)	IK-class	Available width (B)										
			20*	30*	40*	60*	100	110*	130*	150*	190*	230*	
	10	IK 06	20*										
	15	IK 06	15*	30*									
	18	IK 06	18*										
	25	IK 08	40*										
	30	IK 08	30*										
	40	IK 08	40*	60*	100								
	60	IK 08	60*	90*	110*	130*	150*	190*	230*				

\*...VDE certificated

