


## UEKD V E

stainless steel hinged cover unit, triple, angular

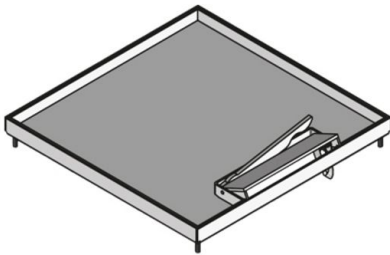

Quadrangular cartridge made of stainless steel sheet with hem. As a cartridge installation frame with inlay cartridge, cable outlet, floor-level cable outlet, self-closing opening lever and rubber seal. For mounting on top of levelling devices in floor boxes, assembly covers and double or hollow floor openings. To accommodate up to 3 mounting boxes equipped with up to 9 suspension bracket installation devices or 12 installation devices of 45x45 mm. Suitable for rooms with dry and damp-cleaned floor covers. Designed for office traffic loads.

Please mind the technical information in chapter planning.



material	cartridge and frame: 2 mm high-grade steel V2A
type of assembly	fastening to floor box UBDHB7levelling unit UNE
application area	dry floor cleaning
protection class	in use IP 20 / not in use IP 30
norm	according to DIN EN 50085
permits	according to VDE / TÜV
loading	including inspection stamp Ø 13 / 130 mm: 2 / 3 kN

### Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	H <sub>min</sub>	B	L	E	T	P <sub>max</sub>	IP <sub>n</sub>	IP <sub>g</sub>	G
UEKD 15-V E	19 mm	85 mm	258 mm	258 mm	261 x 261 mm	12 mm	2 kN	IP 30	IP 20	1,8 kg
incl.:										
4x UKS M4X16E					Phillips screw					
1x UGD-V 2					rubber seal, square					
UEKD 25-V E	29 mm	95 mm	258 mm	258 mm	261 x 261 mm	22 mm	2 kN	IP 30	IP 20	2 kg
incl.:										
4x UKS M4X16E					Phillips screw					
1x UGD-V 2					rubber seal, square					



Product	H	H <sub>min</sub>	B	L	E	T	P <sub>max</sub>	IP <sub>n</sub>	IP <sub>g</sub>	G
UEKD 35-V E	39 mm	105 mm	258 mm	258 mm	261 x 261 mm	32 mm	2 kN	IP 30	IP 20	2,2 kg
incl.: 4x UKS M4X16E 1x UGD-V 2 Phillips screw rubber seal, square										
UEKD 45-V E	49 mm	115 mm	258 mm	258 mm	261 x 261 mm	42 mm	2 kN	IP 30	IP 20	2,4 kg
incl.: 4x UKS M4X16E 1x UGD-V 2 Phillips screw rubber seal, square										


## Brass

Product	H	H <sub>min</sub>	B	L	E	T	P <sub>max</sub>	IP <sub>n</sub>	IP <sub>g</sub>	G
UEKD 25-V MS	29 mm	95 mm	258 mm	258 mm	261 x 261 mm	16 mm	2 kN	IP 30	IP 20	2 kg
incl.: 4x UKS M4X16E 1x UGD-V 2 Phillips screw rubber seal, square										
UEKD 35-V MS	39 mm	105 mm	258 mm	258 mm	261 x 261 mm	26 mm	2 kN	IP 30	IP 20	2,2 kg
incl.: 4x UKS M4X16E 1x UGD-V 2 Phillips screw rubber seal, square										

**H:** height  
**H<sub>min</sub>:** Minimum installation height  
**B:** width  
**L:** length  
**E:** fitting dimension  
**T:** depth  
**P<sub>max</sub>:** Maximum load  
**IP<sub>n</sub>:** IP protection level in unused condition  
**IP<sub>g</sub>:** IP protection level in used condition  
**G:** weight



## DETAILS / APPLICATIONS

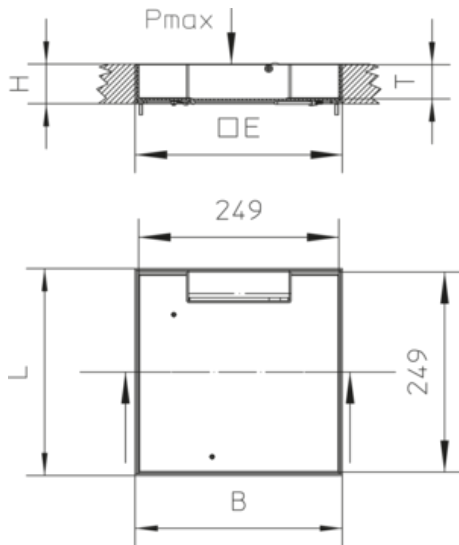

## OPTIONAL ACCESSORIES

UEKDE V, UNE



dry-cleaned

