


UST45 4

shockproof socket, quadruple

One-piece latchable quadruple isolated ground receptacle, 45x45 mm design made of plastic with 45° plugging angle, push terminals, increased contact protection according to VDE 0620 and nominal voltage/- current: AC 250 V, 10/16 A.

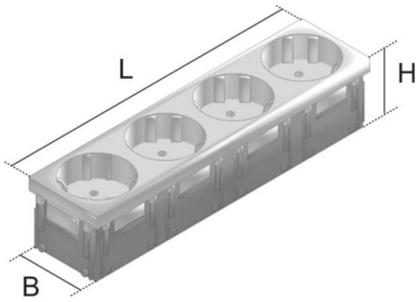

Polycarbonate

Product	H	B	L	plug angle	G
UST45-W 4	40 mm	40 mm	180 mm	45 °	0,12 kg
UST45-R 4	40 mm	40 mm	180 mm	45 °	0,12 kg

H: height

B: width

L: length

:

plug angle:

G: weight

OPTIONAL ACCESSORIES

UAM 4

