


STRIPPING TOOLS FOR SEMICONDUCTOR

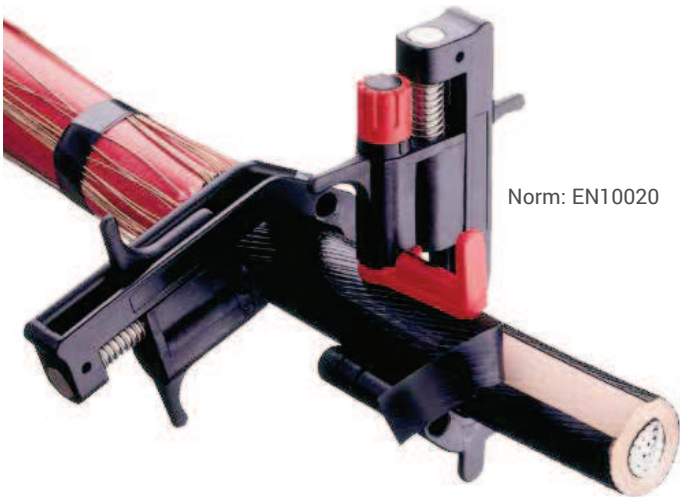


Norm: EN10020

HLS - Cable stripper for non-vulcanized semiconductive layer

APPLICATION RANGE	Ø 16 - 41 mm
INSULATION THICKNESS	0 - 2 mm
SUGGESTED APPLICATION	Non vulcanized, peelable semiconductive layer


- Technical characteristics:
- To strip the non-vulcanized semiconductive layer of MV cables
 - Longitudinal, helical and circular cuts
 - Positioned on the cable comparable to a vice system
 - Stop clamp to limit the stripping length
 - Gradually depth adjustment
 - Maximal rotating diameter 130 mm
 - The positioning of the stripper and holding of stops-clamp is assured by the pressure of the spring
 - The incision depth can be adjusted from 0 to 0,9 mm with 0,1 mm steps each by turning the corresponding knob
 - The start of longitudinal incision can be done in exact correspondence with the circumferential incision.

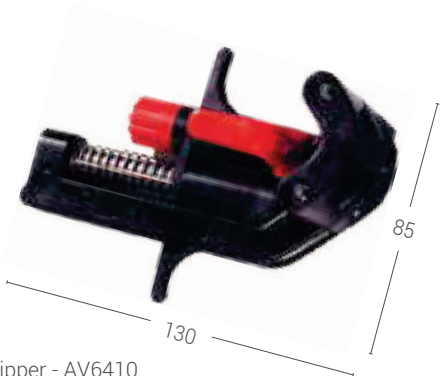

Cable stripper - AV6410



Stop clamp - AV6411

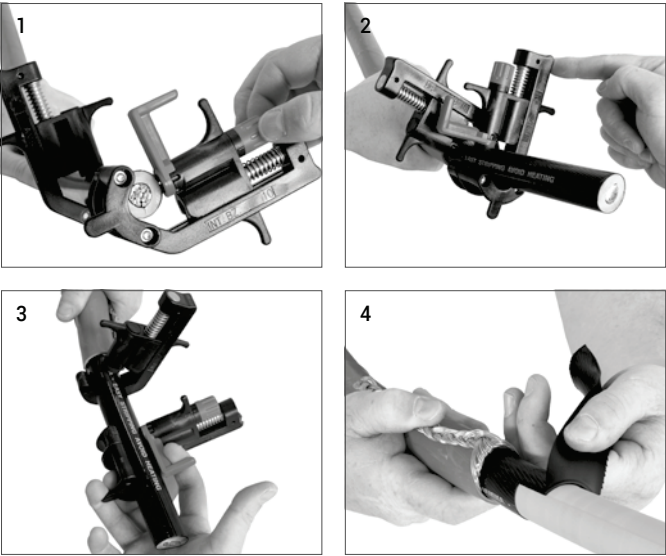

- SMALL AND COMPACT DESIGN
- PERFECT PRECISE CIRCULAR CUT
- NO INCISIONS ON SURFACE BELOW

Description	Order No.	Dimensions	Weight
Set: HLS	AV6400	175 x 65 x 50 mm	600 g
Spare blade	AV6499	-	-

ATTENTION: NOT SUITABLE FOR WORK UNDER VOLTAGE!

- Set equipment:
- HLS - cable stripper AV6410
 - Stop clamp AV6411
 - Tube of silicone grease AG1013
 - Rigid resin case AB6400



HLS-Set - AV6400