




Your Personal Connection

4.0 Terminals

Solder butt connectors

Temperature range : -55 °C up to +125 °C
 Shrink temperature : > +140 °C
 Insulation material : Polyolefin

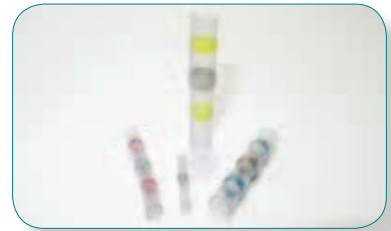

| Typenr. | Color | Wire range (mm ²) | Length (mm) | Packing (pcs) |
|---------------------------|-------------|-------------------------------|-------------|---------------|
| Solder 0.2 - 0.75 transp. | Transparent | 0,2 ~ 0,75 | 40,0 | 100 |
| Solder 0.6 - 2.0 red | Red | 0,6 ~ 2,0 | 40,0 | 100 |
| Solder 1.8 - 2.5 blue | Blue | 1,8 ~ 2,5 | 40,0 | 100 |
| Solder 2.4 - 4.5 yellow | Yellow | 2,4 ~ 4,5 | 40,0 | 100 |

PVC fully insulated receptacle disconnectors

Maximum electrical rating : 300 V max.
 Maximum temperature : 75 °C
 Insulation material : PVC
 Terminal material : Brass

Also available without sleeve and with "easy entry"



| Typenr. | Color | Wire range (mm ²) | Diameter connector (mm) | AWG | Packing (pcs) |
|-----------|--------|-------------------------------|-------------------------|---------|---------------|
| Kog v 4 r | Red | 0,5 ~ 1,5 | 4,0 | 22 ~ 16 | 100 |
| Kog v 4 b | Blue | 1,5 ~ 2,5 | 4,0 | 16 ~ 14 | 100 |
| Kog v 5 b | Blue | 1,5 ~ 2,5 | 5,0 | 16 ~ 14 | 100 |
| Kog v 5 g | Yellow | 4,0 ~ 6,0 | 5,0 | 12 ~ 10 | 100 |