


FO patchcords, pigtail, multipatchcords

Patchcords BKT

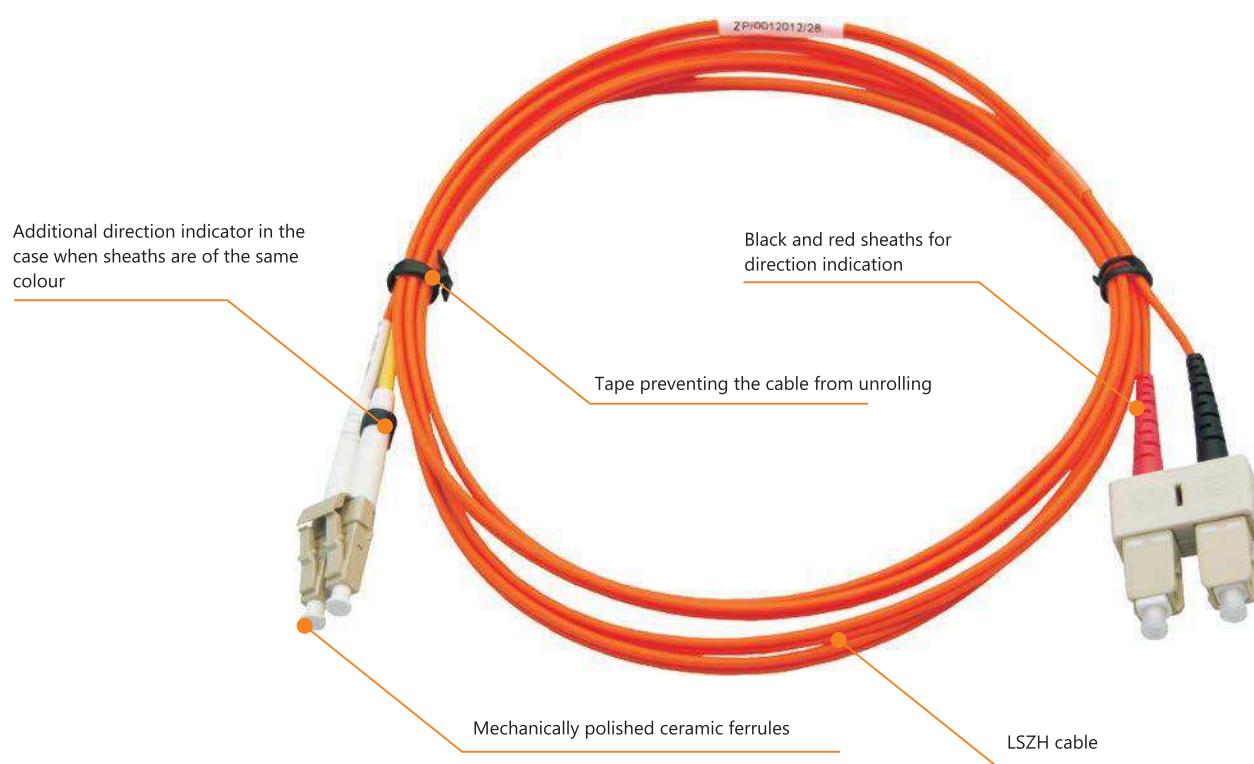

Duplex cables

	UPC single-mode	OM1 multi-mode	OM2, OM3, OM4 multi-mode
Fiber type	SM G652.D	MM	MM
Core diameter	9 µm	62,5 µm	50 µm
Outer jacket material	LSZH	LSZH	LSZH
Cable diameter LC and LC hybrid patchcords	2 mm	2 mm	2 mm
Cable diameter other then LC hybrid patchcords	2 mm	3 mm	3 mm
Maximum tensile load short term	400N	400N	400N
Maximum tensile load long term	200N	200N	200N
Minimum bend radius short term	30 mm	30 mm	30 mm
Minimum bend radius long term	45 mm	45 mm	45 mm
Cable weight 2mm (duplex)	9 kg/km	9 kg/km	9 kg/km
Cable weight 3mm (duplex)	16 kg/km	16 kg/km	16 kg/km

Duplex set colours

	UPC single-mode	APC single-mode	Om1, OM2 multi-mode	OM3 multi-mode	OM4 multi-mode
Connector FC	metallic	metallic	metallic	metallic	metallic
Shield FC	black and red	green	black and red	black and red	black and red
Connector LC	blue	green	beige	turquoise	erica violet
Shield LC	white	green	white	white	white
LC duplex clip	blue	white	beige	turquoise	erica violet
Connector SC	blue	green	beige	turquoise	erica violet
Shield SC	black and red	green	black and red	black and red	black and red
SC duplex clip	blue	green	beige	turquoise	beige
Connector ST	metallic	metallic	metallic	metallic	metallic
Shield ST	black and red	—	black and red	black and red	black and red
Cable colour	yellow	yellow	orange	turquoise	erica violet

FO patchcords, pigtail, multipatchcords

Patchcords BKT



Patchcord DUPLEX SC-SC SM



Patchcord SIMPLEX LC-LC SM



Patchcord DUPLEX E2000 APC-E2000 APC



Patchcord DUPLEX SC APC-SC



Patchcord DUPLEX ST-ST MM



Patchcord DUPLEX SC-SC MM



Patchcord SIMPLEX SC-SC SM



Patchcord SIMPLEX ST-ST SM



Patchcord DUPLEX FC-FC OM3



Patchcord SIMPLEX SC-SC MM



Patchcord DUPLEX LC-LC MM



Patchcord DUPLEX LC-LC SM



Patchcord DUPLEX LC-SC MM



Patchcord DUPLEX FC-FC SM



Patchcord SIMPLEX FC APC-E2000 APC



Patchcord SIMPLEX ST-SC SM

Standard packaging

Provided as an approx 16cm coil.

When coiled, a patchcord is kept together with the use of tape.

Supplied in sealed plastic bags as a standard.

The label inside provides information on:

- Product name
- Length
- Maximum permissible attenuation
- Minimum permissible reflection loss (single-modes)
- Index

Ordering information

Cable type	Fibre type	First connector	Second connector	Packaging option	Length (m)
22Q					
D - duplex	9 - SM OS2	1 - ST	0 - none	0 - plastic bag	
S - simplex	5 - MM OM2	2 - SC	1 - ST	C - 12 pigtail	
	6 - MM OM1	3 - SC APC	2 - SC	colours	
	3 - MMOM3	4 - FC	3 - SC APC		
	8 - MMOM4	5 - FC APC	4 - FC		
	7 - GG57A.1	6 - LC	5 - FC APC		
		8 - E2000PC	6 - LC		
		9 - E2000APC	7 - LC APC		
			8 - E2000 PC		
			9 - E2000 APC		

Example: 22QD5210.2 - Patchcord SC/PC-ST/PC OM2 (50/125) duplex 2 m

