

# Optical distribution box, enclosures, frames, FO accessories


## FO accessories



Name	Index
MM SC Simplex Adapter, beige	104ASM20
MM SC Simplex Adapter, turquoise	104ASM2A
SM SC Simplex Adapter, blue	104ASS20
SM SC APC Simplex Adapter, green	104ASS30
MM SC Duplex Adapter, beige	104ADM20
MM SC Duplex Adapter, turquoise	104ADM2A
SM SC Duplex Adapter, blue	104ADS20
SM SC APC Duplex Adapter, green	11330140
SC MM Simplex Adapter, erika violet	104ASE22

	Single-mode	Multi-mode
SC casing	plastic	plastic
Centring sleeve material	zircon ZrO2	bronze phosphate
SC colour	blue for UPC or green for APC	beige OM1/OM2 turquoise OM3 or erika violet OM4
Max. attenuation	0,15 dB	0,20 dB
Compressive strenght	200-600 g	200-600 g
Max. attenuation increase after 500 cycles	0,2 dB	0,2 dB
Operation temperature	from -40°C to +80°C	from -40°C to +80°C
Non - combustibility degree	UL94-V0	UL94-V0
Dust cup with fiber identify function		

Adapters SC

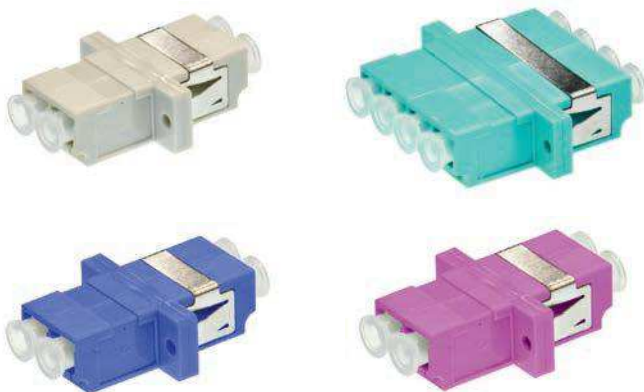

Name	Index
MM LC Duplex Adapter, beige	104ADM60
MM LC Duplex Adapter, turquoise	104ADM6A
SM LC Duplex Adapter, blue	104ADS60
SM LC APC Duplex, green	104ADS70
MM LC quad Adapter, beige	104AQM60
SM LC quad Adapter, blue	104AQS60
SM LC APC quad Adapter, green	104AQS70
LC MM quad Adapter, erika violet	104AQE66

	Single-mode	Multi-mode
LC casing	plastic	plastic
Centring sleeve material	Zircon ZrO2	Zircon ZrO2
LC colour	blue UPC or green for APC	beige OM1/OM2 turquoise OM3 or erika violet OM4
Max. attenuation	0,15 dB	0,20 dB
Compressive strength	200-600 g	200-600 g
Max. attenuation increase after 500 cycles	0,2 dB	0,2 dB
Operating temperature	from -40°C to +80°C	from -40°C to +80°C
Non - combustibility degree	UL94-V0	UL94-V0
Dust cup with fiber identify function		

Adapters LC