




- Degree of protection: IP40
- Ambient temperature: -25–35 °C
- Impact strength: IK08
- Life time: 50000 hours
- System efficacy: 133 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable gland: white, rubber
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 30
- Max. number of luminaires per circuit breaker C16: 51
- Flickering value Pst LM: 0,076
- Power factor: 0,95
- Stroboscope effect value SVM: 0,022
- Total harmonic distortion: 15
- Energy efficiency class of the light source: D

- Body: steel sheet, white (RAL 9003)
- Diffuser: translucent polycarbonate (PC), UV stable, impact resistant
- Reflector: steel sheet, white (RAL 9003)
- Connection: screwless three-pole terminal block
- Surface-mount, indoor light fitting for installation onto the ceiling or wall in public areas, option for series connection
- Opal diffuser made of highly permeable, translucent polycarbonate
- ON/OFF electronic driver (AC, DC on demand)

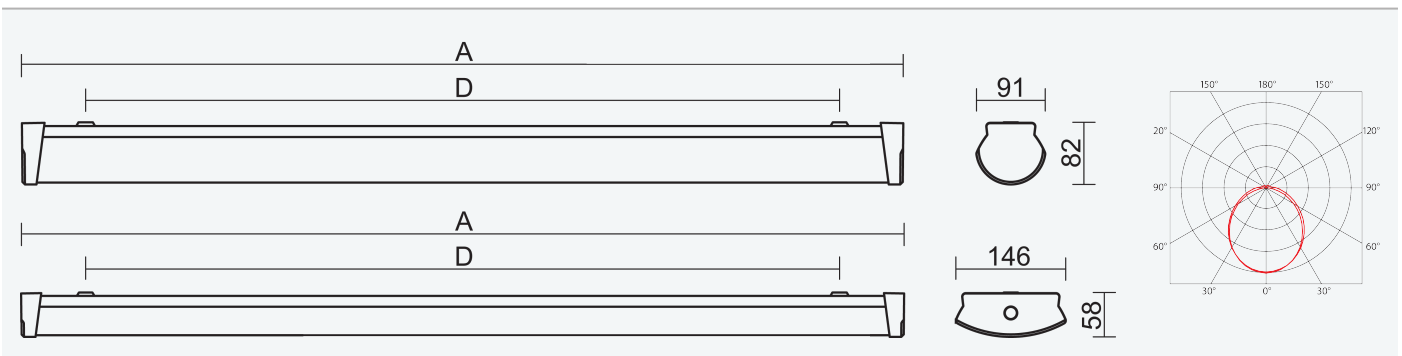

Code	Type	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
54220	BELTR LED 2.2ft 3200/840	3110	2520	19	133	1,3	610	500

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD



