


Data sheet

Part No.	HFXP X BK
Description	pliable/self recovering insulating conduit, halogen-free, corrugated, with glide core medium compression resistance, medium impact resistance
Colour	black, similar to RAL 9005
Fire Behaviour	non flame propagating
Classification	33433
Compression resistance	>750 N

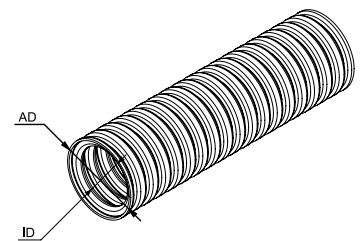

Standard: EN 61386-1, EN 61386-22

halogenfrei according to DIN VDE 0604

halogenfree according to EN 50642

halogenfree according to EN 60754



Compressive strength	Impact strength	Operating temperature	Bending strength	UV-Level*
Medium (class 3)	Medium (class 3)	-25 to +105 °C	Pliable, self recovering	L2

Art. no.	Outer diameter	Inner diameter	Bending radius	ps	pl
104 830	20 mm	13,3 mm	100 mm	100 m	4000 m
104 831	25 mm	17,5 mm	125 mm	100 m	2800 m

Areas of Recommended Application

Area	
Flush mounted (plaster)	True
Surface mounted	True
Suitable for concrete installation	True
Machine and systems installation	True
Suitable for subsurface installation (screed))	True
Outdoor installation	True
Suitable for installation on wood	True
Hollow wall	True
Underground installation	True

Further technical details

Details	
Halogen free	True
High conducting inner coating	True
With sleeve	False
Fire retardant version	True
Material	PP-Blend

*) L1: Indoor use - to avoid UV discoloration (no exposure to direct sunlight).

L2: Partially shaded: Outside, in areas with sun only for two to four hours a day, in shadowy places.

L3: Full sun: To be used also in areas with whole-day exposure to sunlight, e. g. roofs, antenna poles or PV panels.

Civil engineering and road construction products marked "L2" have to be laid in the shortest time possible to ensure color fastness and stability.